

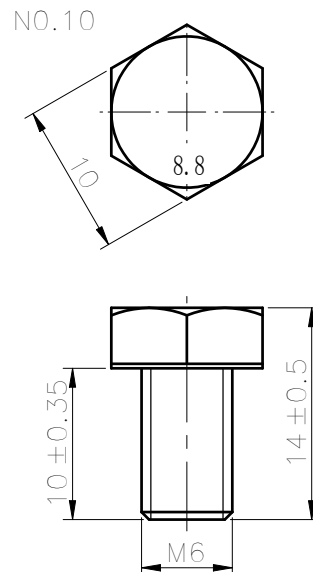
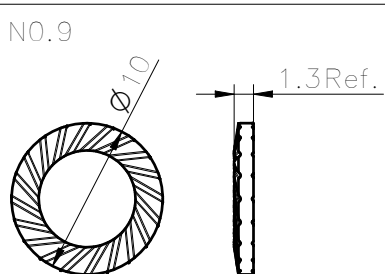
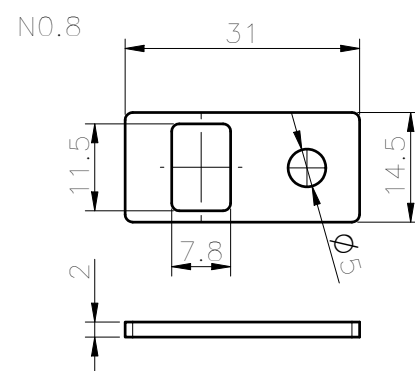


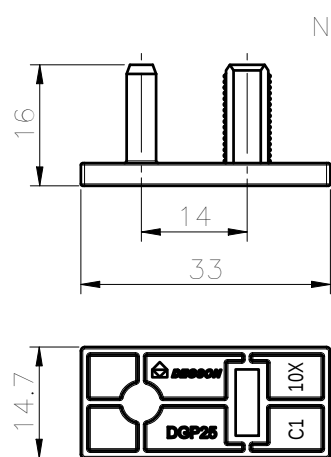

未注公差/General tolerances(mm)														 0.1/10  ±2
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

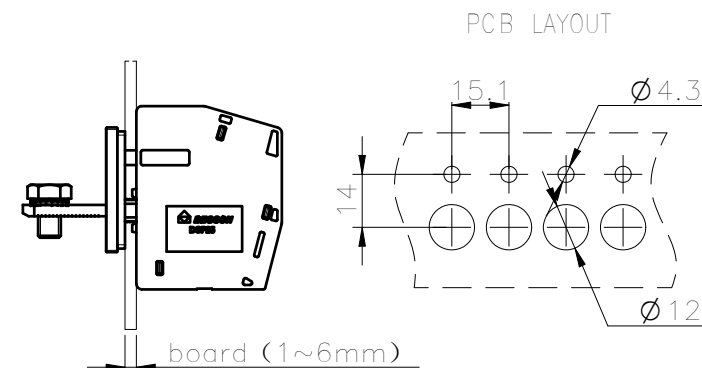

Note: The A&Z(H) in the name means: A(H) and Z(H).

10	Screw2	Steel	Zn Plated
9	Lock Washer	Steel	Zn Plated
8	Antivibration Pad	EVA	Black
7	Housing3	PA66	UL94V-0
6	Current carrier	Copper	Sn Plated
5	Steel cage	SPCC	Zn Plated
4	Copper cage	Copper Alloy	Ni Plated
3	Screw1	Steel	Zn Plated
2	Housing2	PA66	UL94V-0
1	Housing1	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	600/115	600/115	600/5
IEC 标准/IEC Standard:			
电压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	500/101	/	/
额定脉冲电压(kV)/Rate Impulse Voltage(kV)	6	/	/
螺栓扭矩/Torque Tightening(N·m/Lb.in)		M5, 4.0/35.44 M6, 6.0/53.16	
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm ²)		8~2/ 6~35(sol)&10~25(str)	
间距/Pitch(mm)/线数范围/Poles		15.10/N=01P	
剥线长度/Stripping length(mm)		19.0	
使用温度范围/Operating temperature(°C)		-40~+105	
符合 RoHS 环保要求/Conform to RoHS		Yes	

		MATERIAL:		SURFACE/COLOR:	
		MAT NO./REV: - / 00		MAT STATUS: 批量	
APPD: 蓝贵凡	2022.12.05	NAME			
CHKD: 曹利彬	2022.12.05	DGP25-01P-1Y-00A&Z(H)			
DRFT: 姜民洁	2022.12.05	DRAWING NO.	TYPE	DRAWING STATUS	SHEET
  A4	 200049183	CUSTOMER DRAWING	已发布	2:1	1/1

00				
REV	ECN	DESCRIPTION	DRFT	DATE