


未注公差/General tolerances(mm)

0 ~3	>3 ~6	>6 ~10	>10 ~18	>18 ~30	>30 ~50	>50 ~80	>80 ~120	>120 ~180	>180 ~250	>250 ~315	>315 ~400	>400 ~500	>500	0.1/10 ±2'
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

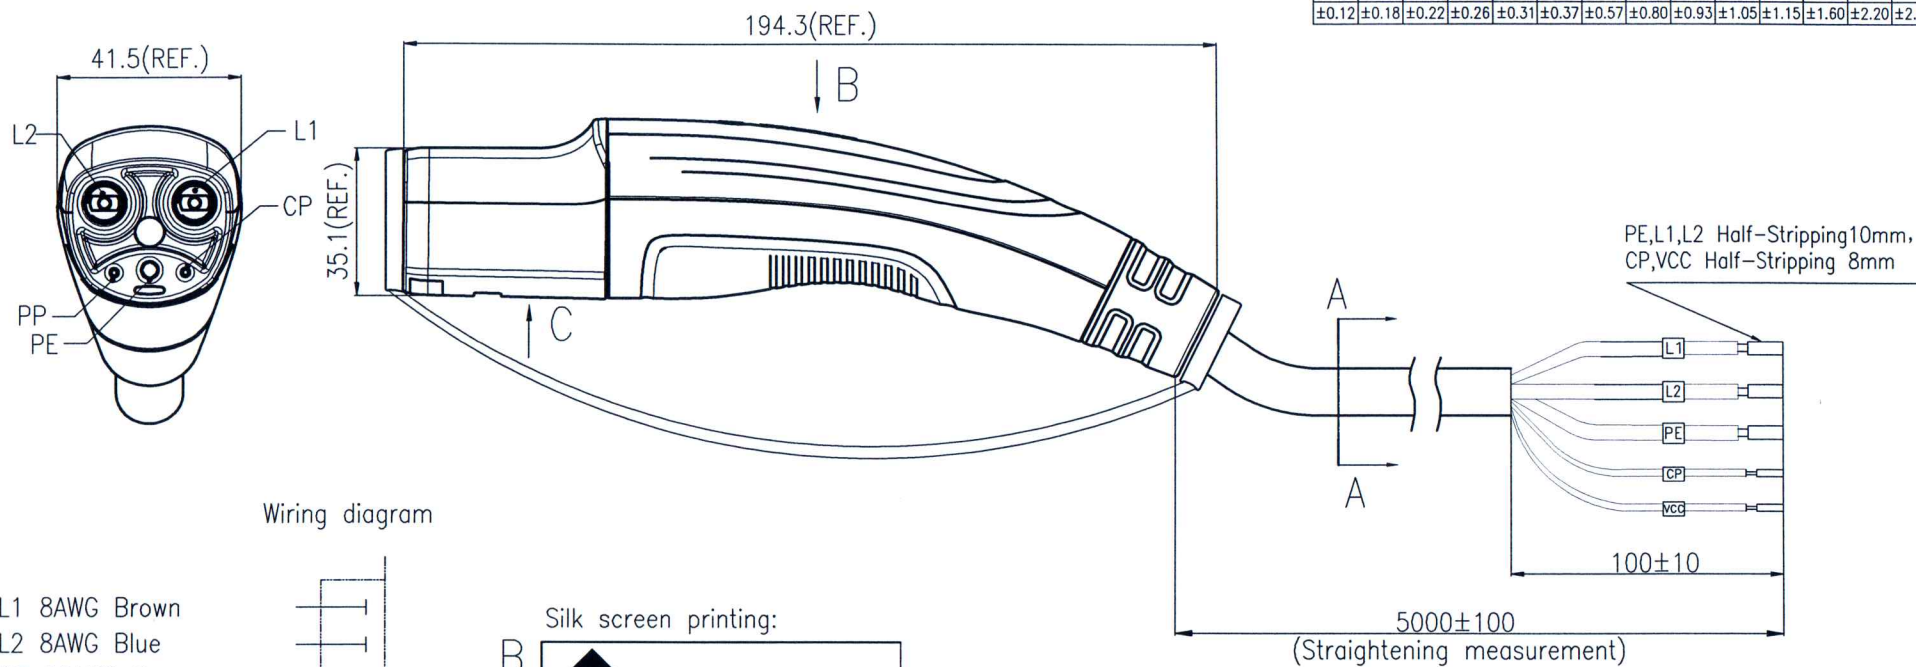

额定电压/Rated voltage	240V AC/40A
绝缘电阻/Insulation resistance	>100MΩ, 500V DC 1min
耐压/Withstanding voltage	L1, L2 and PE, 2500V AC 1min L1 and L2, 2500V AC 1min
防护等级/Ingress protection	TYPE 3R
插拔寿命/Insertion/Pullout times	10,000 Times
插拔力/Insertion/Pullout force	<90N
使用温度范围/Operating temperature(°C)	-40~+50
线材规格/Cable specification	2*8AWG+1*10AWG+4*22AWG Black
标准/Reference standard	NACS, UL2251
符合RoHS环保要求/Conform to RoHS	Yes

DEGSON		MATERIAL:	SURFACE/COLOR:	
MAT NO./REV DO-1		MAT STATUS		
APPROVED: 24.8.13	NAME	MTAC-S-040A-V3-03-5.0M-10A(H)		
CHKD: 24.8.13	DRAWING NO.	TYPE	DRAWING STATUS	SCALE
DRFT Zhang Q 2024.07.02	CUSTOMER DRAWING			1:3
mm inch				SHEET 1/1

(DO-1)

Initial release

Zhang Q

2024.07.02

DRFT

Zhang Q 2024.07.02

DRAWING NO.

TYPE

DRAWING STATUS

SCALE

SHEET

REV

ECN

DESCRIPTION

DRFT

DATE

CUSTOMER DRAWING

1:3

1/1