


REVISIONS					
REV	ECO	DESCRIPTION	DATE	BY	APPR
A1	-	RELEASE NEW DWG FORMAT	18APR19	BROOK	TOMMY

WIRING DIAGRAM















AMPHENOL

ATM06-2S

BLACK END CAP_ AND CONNECTOR BODY


14.40

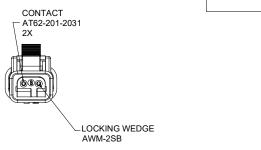



NOTES: UNLESS OTHERWISE SPECIFIED

- 1. MATERIAL: HOUSING: THERMOPLASTIC;BLACK SEAL: SILICONE RUBBER
- 2. MODIFICATIONS: RESISTOR
- 3. CONNECTOR SPECIFICATIONS:
 - 3.1 CURRENT RATING: 7.5 AMPS
 - 3.2 OPERATING TEMPERATURE: -55°C TO +125°C
 - 3.3 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.
 - 3.4 INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 25°C.
 - 3.5 MOISTURE RESISTANCE: IP67 (MATED CONDITION)
 - 3.6 MATING CYCLE DURABILITY: 100 CYCLES
 - 3.7 RoHS COMPLIANT
- 4. RESISTOR SPECIFICATIONS:120 OHMS.
- 5. MATING PART: ATM04-2P* RECEPTACLE (* = MODIFICATIONS AND COLORS)
- 6. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

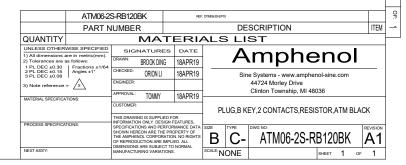

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol:

ATM06-2S-RB120BK