

NOTES: UNLESS OTHERWISE SPECIFIED


1. MATERIAL:

HOUSING: THERMOPLASTIC SEAL: SILICONE RUBBER

2. MODIFICATIONS: N/A

- 3. SPECIFICATIONS:
 - 3.1 CURRENT RATING: 25 AMPS
 - 3.2 OPERATING TEMPERATURE: -55°C TO +125°C
 - 3.3 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.
 - 3.4 INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 25°C.
 - 3.5 MOISTURE RESISTANCE: IP67 (MATED CONDITION)
 - 3.6 MATING CYCLE DURABILITY: 100 CYCLES
 - 3.7 RoHS COMPLIANT
- 4. MATING PART: ATP04-2P* RECEPTACLE. (* = MODIFICATIONS AND COLORS)
- 5. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.
- 6 CONTACT SIZE AND REAR SEAL WIRE RANGE:

CONTACT	MIN. INSUL	MAX. INSUL	TYPICAL
SIZE	O.D.	O.D.	WIRE RANGE
12	3.40 mm (.134 in)	4.95 mm (.195 in)	

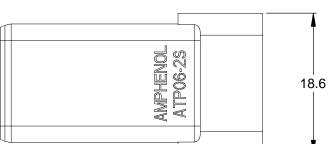

PART NI	PART NUMBER CHART			
COLOR	PART NUMBER			
GREY	ATP06-2S			
BLACK	ATP06-2S-BLK			


STANDARD MOLDED COLOR IS GREY. ADDITIONAL COLOR (BLACK) IS AVAILABLE VIA SPECIAL ORDER.


	REVISIONS						
REV	ECO	DESCRIPTION	DATE	BY	APPR		
А3	-	RELEASE NEW DWG FORMAT	18/OCT/13	DRP	-		

PLUG, 2 SOCKET, ATP SERIES

ATP06-2S-XXX

A 3

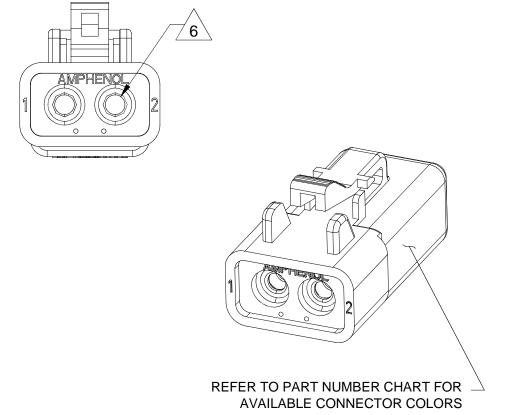

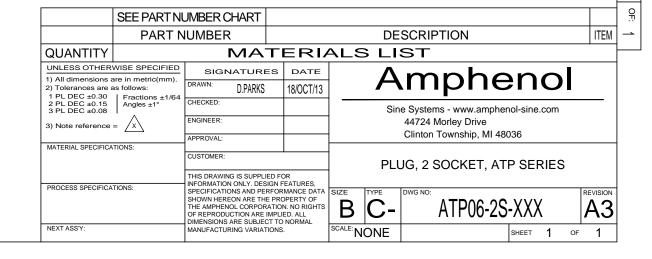

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol: ATP06-2S-BLK