

TITLE: CONTACT, PIN, SOLID, SIZE 20, 20 - 22 AWG, ATM SERIES REV: A5 SH: 1 OF: 1 AT60-202-20XXX

REVISIONS									
REV ECO DESCRIPTION		DESCRIPTION	DATE	BY	APPR				
A3	-	RELEASE NEW DWG FORMAT	16/JUL/13	DRP	-				
A4	A4 - ADDED BARREL DIA. 1.27		04/DEC/14	JAH	-				
A5	-	REVISED OVERALL LENGTH LIMITS	19/APR/16	JAH	-				

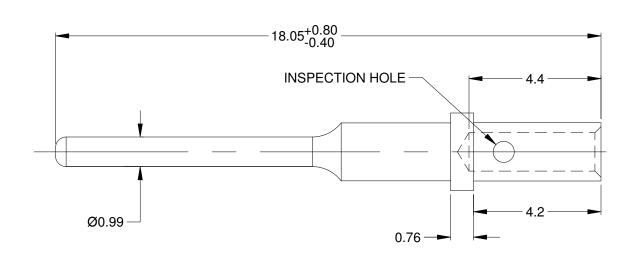



ITEM

A5

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL: COPPER ALLOY

2. PLATING: SEE PART NUMBER CHART

3. CONTACT SIZE: 20

4. SPECIFICATIONS:

4.1 CURRENT RATING: 7.5 AMPS

4.2 CONTACT MILLIVOLT DROP: 60 MILLIVOLT DROP @ 7.5 AMP TEST CURRENT.

4.3 RoHS COMPLIANT

5. RECOMMENDED WIRE RANGE: 20 - 22 AWG

6. AVAILABLE HAND CRIMPER: CA-5D12

7. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY

PART N	PART NUMBER CHART				
PLATING	PART NUMBER				
GOLD	AT60-202-2031				
NICKEL	AT60-202-20141				

SEE PART NUMBER CHART

PART NUMBER				DESCRIPTION			
QUANTITY MA			IAT	TERIALS LIST			
UNLESS OTHER		SIGNAT	URES	DATE	Amphone		mphonol
2) Tolerances are a		DRAWN: D.	PARKS	16/JUL/13			mphenol
2 PL DEC ±0.15 3 PL DEC ±0.08		CHECKED:				Sine Systems - www.amphenol-sine.com	
3) Note reference = X MATERIAL SPECIFICATIONS:		ENGINEER:				44724 Morley Drive Clinton Township, MI 48036	
		APPROVAL:			Clinton Township, Wi 40000		
WATERIAL SPECIFICATIONS.		CUSTOMER:		CONTACT, PIN, SOLID, SIZE 20, 20 - 22 AWG, ATM SERIES			
		THIS DRAWING IS SUPPLIED FOR					
PROCESS SPECIFICATIONS:		INFORMATION ONLY. DESIGN FEATURES, SPECIFICATIONS AND PERFORMANCE DATA SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL MANUFACTURING VARIATIONS.		A	C-	AT60-202-20XXX	
NEXT ASS'Y:				SCALE: N	ONE	SHEET 1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol:

AT60-202-20141