



REVISIONS           REV         ECO         DESCRIPTION         DATE         BY	
REV ECO DESCRIPTION DATE BY	
	APPR
A3 - RELEASE NEW DWG FORMAT 11DEC13 DRP	-
A4 C0540S UPDATE DIMENSIONS 22JUL16 JONY	TOMMY
A5 - ADD COLOR OPTION 23NOV20 LOUIE	TOMMY



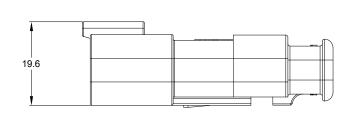

NOTES: UNLESS OTHERWISE SPECIFIED

MATERIAL:

HOUSING: THERMOPLASTIC SEAL: SILICONE RUBBER


- 2. MODIFICATIONS: STRAIN RELIEF END CAP; REDUCED DIA. WIRE SEAL
- 3. SPECIFICATIONS:
  - 3.1 CURRENT RATING: 13 AMPS
  - 3.2 OPERATING TEMPERATURE: -55°C TO +125°C
  - 3.3 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.
  - 3.4 INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 25°C.
  - 3.5 MOISTURE RESISTANCE:

IP68(1M OF WATER FOR A PERIOD OF 24 HOURS, MATED CONDITION) IP69K(MATED CONDITION)


- 3.6 MATING CYCLE DURABILITY: 100 CYCLES
- 3.7 RoHS COMPLIANT
- 4. MATING PART: AT06-4S\* PLUG (\* = MODIFICATIONS AND COLORS)
- 5. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

<u>6</u>	CONTACT	SIZE	AND RE	AR SI	EAL WIF	RE RANGE:
	CONTACT	B 41 B I	INIOLII	B 4 A V	INIOLII	TVDIOAI

O D	OD	WIRE RANGE
0.5.	U.D.	WIKE KANGE
35 mm 053 in)	3.05 mm (.120 in)	14 - 20 AWG (2.0-0.5mm²)

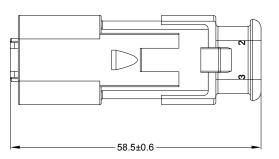

PART NUMBER CHART			
COLOR	PART NUMBER		
GREY	AT04-4P-SR02GRY		
BLACK	AT04-4P-SR02BLK		
BLUE	AT04-4P-SR02BLU		
BROWN	AT04-4P-SR02BRN		
GREEN	AT04-4P-SR02GRN		
RED	AT04-4P-SR02RED		
WHITE	AT04-4P-SR02WHT		
YELLOW	AT04-4P-SR02YEL		
ORANGE	AT04-4P-SR02ORG		

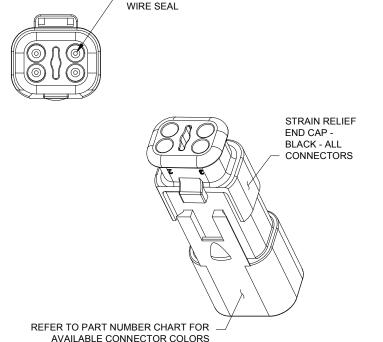

**MATERIALS LIST** 

В С-

SCALE: NONE

23NOV20

25NOV20

27NOV20

SIGNATURES DATE

LOUIE

ORION

TOMMY

THIS DRAWING IS SUPPLIED FOR NORMATION ONLY, DESIGN FEATURES, SPECIFICATIONS AND PERFORMANCE DATA SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION NO RIGHTY OF REPRODUCTION ARE IMPLIED, ALL DIMENSIONS ARE SUBJECT TO NORMAL MANUFACTURING VARIATIONS.

DESCRIPTION

**Amphenol** 

Sine Systems - www.amphenol-sine.com 44724 Morley Drive

RECEPTACLE, 4 PIN, AT SERIES, STRAIN

RELIEF END CAP, REDUCED DIA. WIRE SEAL

AT04-4P-SR02XXX

SHEET 1 OF 1

Clinton Township, MI 48036

SEE PART NUMBER CHART

CUSTOMER

PART NUMBER

QUANTITY

PROCESS SPECIFICATIONS

NEXT ASS'Y

UNLESS OTHERWISE SPECIFIED

All dimensions are in metric(mm)
 Tolerances are as follows:

REDUCED DIAMETER

RECEP, 4 PIN, AT, STRAIN RELIEF, REDUCED DIA WIRE SEAL

DWG NO:

AT04-4P-SR02XXX

옰

오

ITEM

## **AT Series™** - Contact Size 16 Options

Machined Contacts, Sockets & Pins				
Part Number	Description	Size	AWG	Туре
AT60-215-1631	Male Contact - Pin, Gold-plated	16	14	Machined
AT62-209-1631	Female Contact - Socket, Gold-plated	16	14	Machined
AT60-215-16141	Male Contact - Pin, Nickel-plated	16	14	Machined
AT62-209-16141	Female Contact - Socket, Nickel-plated	16	14	Machined
AT60-202-1631	Male Contact - Pin, Gold-plated	16	16-20	Machined
AT62-201-1631	Female Contact - Socket, Gold-plated	16	16-20	Machined
AT60-202-16141	Male Contact - Pin, Nickel-plated	16	16-20	Machined
AT62-201-16141	Female Contact - Socket, Nickel-plated	16	16-20	Machined
AT60-202-1631-22	Male Contact - Pin, Gold-plated	16	22-24	Machined
AT62-201-1631-22	Female Contact - Socket, Gold-plated	16	22-24	Machined
AT60-202-16141-22	Male Contact - Pin, Nickel-plated	16	22-24	Machined
AT62-201-16141-22	Female Contact - Socket, Nickel-plated	16	22-24	Machined

Tooling - Machined Contacts			
Part	Part Number	Description	
	CA-5D12	Universal Hand Crimp Tool, Size 12/16/20 (Machined contacts only)	
3	CA-5E12	Pneumatic Crimp Tool, Size 12/16/20 (Machined contacts only)	

Contact Removal Tools				
Part	Part Number	Description		
3	ATRT-100	Used for removal of contacts for A Series™ products		
	AT11-310-1605	Contact Removal Tool, Plastic, Size 16		
	A114017	Sealing Plug, Size 16, White		

Stamped & Formed Contacts, Sockets & Pins				
Part Number	Description	Size	AWG	Туре
AT60-14-0144	Male Contact - Pin, Gold-plated	16	14-16	Stamped & Formed
AT62-14-0144	Female Contact - Socket, Gold-plated	16	14-16	Stamped & Formed
AT60-14-0122	Male Contact - Pin, Nickel-plated	16	14-16	Stamped & Formed
AT62-14-0122	Female Contact - Socket, Nickel-plated	16	14-16	Stamped & Formed
AT60-16-0144	Male Contact - Pin, Gold-plated	16	16-18	Stamped & Formed
AT62-16-0144	Female Contact - Socket, Gold-plated	16	16-18	Stamped & Formed
AT60-16-0122	Male Contact - Pin, Nickel-plated	16	16-18	Stamped & Formed
AT62-16-0122	Female Contact - Socket, Nickel-plated	16	16-18	Stamped & Formed
AT60-16-0644	Male Contact - Pin, Gold-plated	16	18-20	Stamped & Formed
AT62-16-0644	Female Contact - Socket, Gold-plated	16	18-20	Stamped & Formed
AT60-16-0622	Male Contact - Pin, Nickel-plated	16	18-20	Stamped & Formed
AT62-16-0622	Female Contact - Socket, Nickel-plated	16	18-20	Stamped & Formed
AT60-16-0844	Male Contact - Pin, Gold-plated	16	20-22	Stamped & Formed
AT62-16-0844	Female Contact - Socket, Gold-plated	16	20-22	Stamped & Formed
AT60-16-0822	Male Contact - Pin, Nickel-plated	16	20-22	Stamped & Formed
AT62-16-0822	Female Contact - Socket, Nickel-plated	16	20-22	Stamped & Formed

Tooling - Stamped & Formed Contacts				
Part	Part Number	Description		
	MFX-3950	Crimp Die - Size 16, 18-20AWG (S&F contacts only)		
	MFX-3953	Crimp Die - Size 16, 16-18AWG (S&F contacts only)		
	MFX-3975	Crimp Die - Size 16, 14-16AWG (S&F contacts only)		
	MFX-3990	Crimp Die - Size 16, 20-22AWG (S&F contacts only)		
	ATT-16-00	Hand Crimp Tool - Size 16, 14-16AWG (S&F contacts only)		
	ATT-16-01	Hand Crimp Tool - Size 16, 18-20AWG (S&F contacts only)		
	ATT-1612-03	Hand Crimp Tool - Size 16, 20-22AWG (S&F contacts only)		

Amphenol Sine Systems 44724 Morley Drive Clinton Township, MI 48036 USA www.amphenol-sine.com 09/2021

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol:
AT04-4P-SR02BLK