

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL:


HOUSING: THERMOPLASTIC SEAL: SILICONE RUBBER

- 2. MODIFICATIONS: END CAP
- 3. SPECIFICATIONS:
 - 3.1 CURRENT RATING: 13 AMPS
 - 3.2 OPERATING TEMPERATURE: -55°C TO +125°C
 - 3.3 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.
 - 3.4 INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 25°C.
 - 3.5 MOISTURE RESISTANCE: IP68(1M OF WATER FOR A PERIOD OF 24 HOURS, MATED CONDITION) IP69K(MATED CONDITION)
 - 3.6 MATING CYCLE DURABILITY: 100 CYCLES
 - 3.7 RoHS COMPLIANT

Λ


- 4. MATING PART: AT06-6S* PLUG (* = MODIFICATIONS AND COLORS)
- 5. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

<u>/6\</u>	CONTACT SIZE AND REAR SEAL WIRE RANGE:							
	CONTACT	MIN. INSUL	MAX. INSUL	TYPICAL				
	SIZE	O.D.	O.D.	WIRE RANGE				
	40	2.24 mm	3.68 mm	14 - 20 AWG				
	16	(.088 in)	(.145 in)	(2.0-0.5mm ²)				

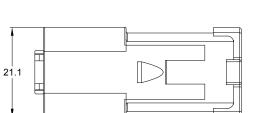

PART NUMBER CHART			
COLOR	PART NUMBER		
GREY	AT04-6P-EC01		
BLACK	AT04-6P-EC01BLK		
BLUE	AT04-6P-EC01BLU		
BROWN	AT04-6P-EC01BRN		
GREEN	AT04-6P-EC01GRN		
RED	AT04-6P-EC01RED		
WHITE	AT04-6P-EC01WHT		
YELLOW	AT04-6P-EC01YEL		
ORANGE	AT04-6P-EC01ORG		

	REVISIONS							
REV	ECO	DESCRIPTION	DATE	BY	APPR			
A3	-	RELEASE NEW DWG FORMAT	03JAN14	JARRY	-			
A4	C0540S	UPDATE DIMENSIONS	04JUL16	JONY	TOMMY			
A5	-	ADD COLOR OPTION	23NOV20	LOUIE	TOMMY			

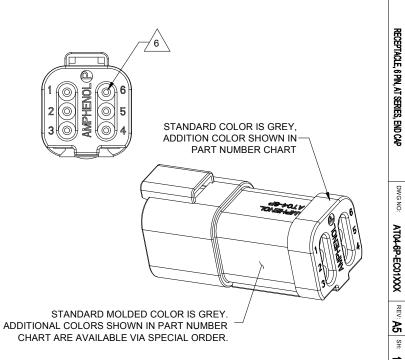

	SEE PART NUMBER CHART			REF: DT04-6P-E003, DT04-6P-EP04, DT04-6P-E005					
	PART N	NUMBER			DESCRIPTION			ITEM	ī] -
QUANTITY		ı	MAT	ERI	ALS LI	ST			╊
	UNLESS OTHERWISE SPECIFIED 1) All dimensions are in metric(mm).		ATURES	DATE		mnha	<u> </u>	I	1
2) Tolerances are a 1 PL DEC ±0.30	as follows:	DRAWN:	LOUIE	23NOV20	Amphenol				
2 PL DEC ±0.15 3 PL DEC ±0.08	Fractions ±1/64 Angles ±1°	CHECKED:	ORION	25NOV20	Sin	e Systems - www.amphe	enol-sine.com		
3) Note reference = X		ENGINEER:			44724 Morley Drive				
MATERIAL SPECIFICA	TIONS:	APPROVAL:	TOMMY	27NOV20		Clinton Township, MI 48	5036		4
		CUSTOMER:		'	RECEPTA	CLE. 6 PIN. AT SE	RIFS FN	D CAP	
PROCESS SPECIFICA			S IS SUPPLIED F ONLY. DESIGN	FEATURES,					
PROCESS SPECIFICATIONS.		SHOWN HERE THE AMPHENO OF REPRODUC	ON ARE THE PR	ON. NO RIGHTS LIED. ALL	В С-	AT04-6P-E0	CO1XXX	A5	,
NEXT ASS'Y:			ING VARIATION	S.	SCALE: NONE		sнеет 1	or 1	1

AT Series™ - Contact Size 16 Options

Machined Contacts, Sockets & Pins					
Part Number	Description		AWG	Туре	
AT60-215-1631	Male Contact - Pin, Gold-plated	16	14	Machined	
AT62-209-1631	Female Contact - Socket, Gold-plated	16	14	Machined	
AT60-215-16141	Male Contact - Pin, Nickel-plated	16	14	Machined	
AT62-209-16141	6141 Female Contact - Socket, Nickel-plated		14	Machined	
AT60-202-1631	Male Contact - Pin, Gold-plated	16	16-20	Machined	
AT62-201-1631	Female Contact - Socket, Gold-plated	16	16-20	Machined	
AT60-202-16141	Male Contact - Pin, Nickel-plated	16	16-20	Machined	
AT62-201-16141	Female Contact - Socket, Nickel-plated	16	16-20	Machined	
AT60-202-1631-22	Male Contact - Pin, Gold-plated	16	22-24	Machined	
AT62-201-1631-22	-201-1631-22 Female Contact - Socket, Gold-plated		22-24	Machined	
AT60-202-16141-22	AT60-202-16141-22 Male Contact - Pin, Nickel-plated		22-24	Machined	
AT62-201-16141-22	Female Contact - Socket, Nickel-plated	16	22-24	Machined	

Tooling - Machined Contacts				
Part	Part Number	Description		
	CA-5D12	Universal Hand Crimp Tool, Size 12/16/20 (Machined contacts only)		
3	CA-5E12	Pneumatic Crimp Tool, Size 12/16/20 (Machined contacts only)		

Contact Removal Tools				
Part	Part Number	Description		
3	ATRT-100	Used for removal of contacts for A Series™ products		
	AT11-310-1605	Contact Removal Tool, Plastic, Size 16		
	A114017	Sealing Plug, Size 16, White		

Stamped & Formed Contacts, Sockets & Pins						
Part Number	Description	Size	AWG	Туре		
AT60-14-0144	Male Contact - Pin, Gold-plated	16	14-16	Stamped & Formed		
AT62-14-0144	Female Contact - Socket, Gold-plated	16	14-16	Stamped & Formed		
AT60-14-0122	Male Contact - Pin, Nickel-plated	16	14-16	Stamped & Formed		
AT62-14-0122	Female Contact - Socket, Nickel-plated	16	14-16	Stamped & Formed		
AT60-16-0144	Male Contact - Pin, Gold-plated	16	16-18	Stamped & Formed		
AT62-16-0144	Female Contact - Socket, Gold-plated	16	16-18	Stamped & Formed		
AT60-16-0122	Male Contact - Pin, Nickel-plated	16	16-18	Stamped & Formed		
AT62-16-0122	Female Contact - Socket, Nickel-plated	16	16-18	Stamped & Formed		
AT60-16-0644	Male Contact - Pin, Gold-plated	16	18-20	Stamped & Formed		
AT62-16-0644	Female Contact - Socket, Gold-plated	16	18-20	Stamped & Formed		
AT60-16-0622	Male Contact - Pin, Nickel-plated	16	18-20	Stamped & Formed		
AT62-16-0622	Female Contact - Socket, Nickel-plated	16	18-20	Stamped & Formed		
AT60-16-0844	Male Contact - Pin, Gold-plated	16	20-22	Stamped & Formed		
AT62-16-0844	Female Contact - Socket, Gold-plated	16	20-22	Stamped & Formed		
AT60-16-0822	Male Contact - Pin, Nickel-plated	16	20-22	Stamped & Formed		
AT62-16-0822	Female Contact - Socket, Nickel-plated	16	20-22	Stamped & Formed		

Tooling - Stamped & Formed Contacts				
Part	Part Number	Description		
	MFX-3950	Crimp Die - Size 16, 18-20AWG (S&F contacts only)		
	MFX-3953	Crimp Die - Size 16, 16-18AWG (S&F contacts only)		
	MFX-3975	Crimp Die - Size 16, 14-16AWG (S&F contacts only)		
	MFX-3990	Crimp Die - Size 16, 20-22AWG (S&F contacts only)		
	ATT-16-00	Hand Crimp Tool - Size 16, 14-16AWG (S&F contacts only)		
	ATT-16-01	Hand Crimp Tool - Size 16, 18-20AWG (S&F contacts only)		
	ATT-1612-03	Hand Crimp Tool - Size 16, 20-22AWG (S&F contacts only)		

Amphenol Sine Systems 44724 Morley Drive Clinton Township, MI 48036 USA www.amphenol-sine.com 09/2021

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol:

AT04-6P-EC01