


## NOTES: UNLESS OTHERWISE SPECIFIED

/1ackslashSEE SHEET 2 FOR KEY ARRANGEMENTS AND COLORS.

2. MATERIAL:

HOUSING: THERMOPLASTIC **SEAL: SILICONE RUBBER** 


- 3. MODIFICATIONS: STRAIN RELIEF END CAP; REDUCED DIA. WIRE SEAL
- 4. SPECIFICATIONS:
  - 4.1 CURRENT RATING: 13 AMPS
  - 4.2 OPERATING TEMPERATURE: -55°C TO +125°C
  - 4.3 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.
  - 4.4 INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 25°C.
  - 4.5 MOISTURE RESISTANCE: IP67 (MATED CONDITION)
  - 4.6 MATING CYCLE DURABILITY: 100 CYCLES
  - 4.7 RoHS COMPLIANT
- 5. MATING PART: AT06-08SX\* PLUG ( X = A,B,C,D KEYS; \* = MODIFICATIONS AND COLORS )
- 6. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

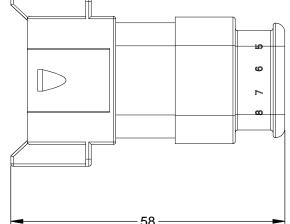


## 7\CONTACT SIZE AND REAR SEAL WIRE RANGE:

CONTACT	MIN. INSUL	MAX. INSUL	TYPICAL
SIZE	O.D.	O.D.	WIRE RANGE
16	1.35 mm (.053 in)	3.05 mm (.120 in)	

REVISIONS					
REV ECO DESCRIPTION DATE		BY	APPR		
А3	-	RELEASE NEW DRAWING FORMAT	11DEC13	DRP	-

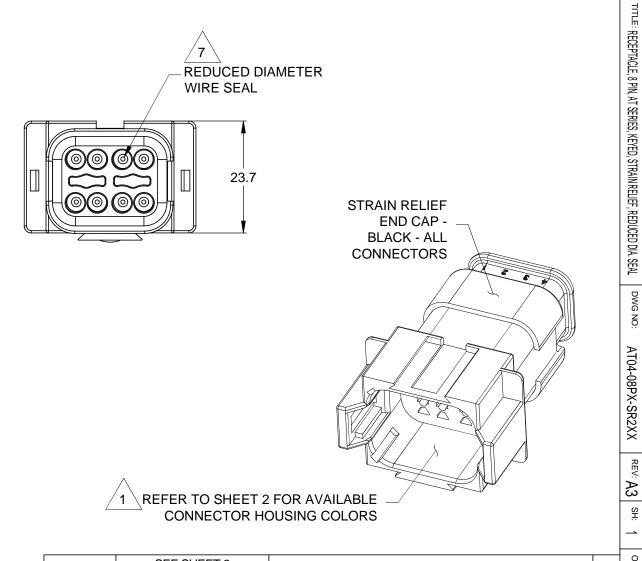


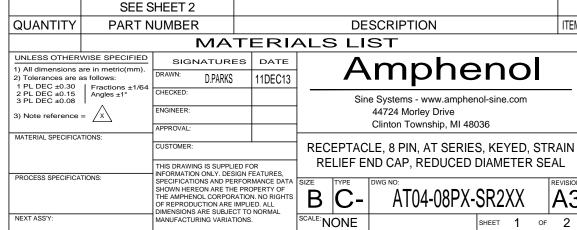

ITEM ~


REVISIONS						
	REV	ECO	DESCRIPTION	DATE	BY	APPR

P/N AT04-08PA-SR2GY KEY-A CONFIGURATION STANDARD COLOR: GREY

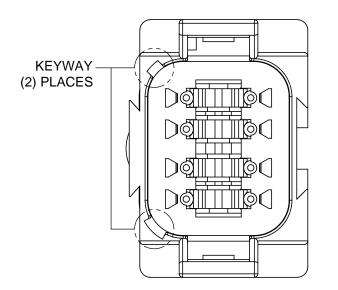


KEY-A CONFIGURATION				
COLOR	PART NUMBER			
* GREY	AT04-08PA-SR2GY			
BLACK	AT04-08PA-SR2BK			
GREEN	AT04-08PA-SR2GN			
BROWN	AT04-08PA-SR2BR			

P/N AT04-08PB-SR2BK KEY-B CONFIGURATION STANDARD COLOR: BLACK

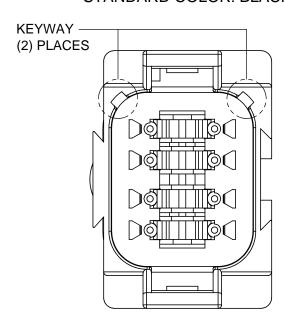


KEY-B	KEY-B CONFIGURATION		
COLOR	PART NUMBER		
GREY	AT04-08PB-SR2GY		
*BLACK	AT04-08PB-SR2BK		
GREEN	AT04-08PB-SR2GN		
BROWN	AT04-08PB-SR2BR		

P/N AT04-08PC-SR2GN KEY-C CONFIGURATION STANDARD COLOR: GREEN

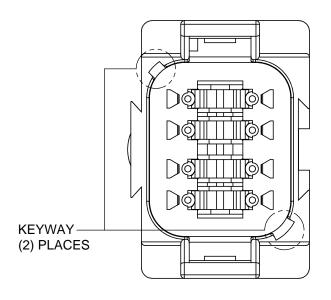

RATION NUMBER
NUMBER
BPC-SR2GY
BPC-SR2BK
BPC-SR2GN
BPC-SR2BR
֡

P/N AT04-08PD-SR2BR KEY-D CONFIGURATION STANDARD COLOR: BROWN

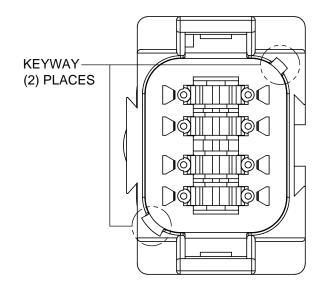

*BROWN	AT04-08PD-SR2BR	
GREEN	AT04-08PD-SR2GN	
BLACK	AT04-08PD-SR2BK	
GREY	AT04-08PD-SR2GY	
COLOR	PART NUMBER	
KEY-D CONFIGURATION		

NOTE:

AN ASTERISKS (\*) PLACED BEFORE THE COLOR DENOTES THE STANDARD MOLDED COLOR OF THE CONNECTORS SHOWN ABOVE. STRAIN RELIEF END CAPS ARE AVAILABLE IN BLACK ONLY.

OTHER COLORS SHOWN ARE AVAILABLE VIA SPECIAL ORDER.

DESCRIPTION ITEM ~ QUANTITY PART NUMBER MATERIALS LIST UNLESS OTHERWISE SPECIFIED **Amphenol** SIGNATURES DATE 1) All dimensions are in metric(mm) D.PARKS 11DEC13 1 PL DEC ±0.30 | Fractions ±1/64 2 PL DEC ±0.15 3 PL DEC ±0.08 | Angles ±1° Sine Systems - www.amphenol-sine.com 44724 Morley Drive 3) Note reference = X Clinton Township, MI 48036 MATERIAL SPECIFICATIONS: RECEPTACLE, 8 PIN, AT SERIES, KEYED, STRAIN RELIEF END CAP, REDUCED DIAMETER SEAL THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY. DESIGN FEATURES, SPECIFICATIONS AND PERFORMANCE DATA SIZE PROCESS SPECIFICATIONS SHOWN HEREON ARE THE PROPERTY OF B C-AT04-08PX-SR2XX **A3** THE AMPHENOL CORPORATION, NO RIGHT OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL MANUFACTURING VARIATIONS. NEXT ASS'Y: SCALE: NONE SHEET 2 OF 2

REV: A3 SH: 2

AT04-08PX-SR2XX

TITLE: RECEPTACLE, 8 PIN, AT SERIES, KEVED, STRAINRELIEF, REDUCED DIA. SEAL

Z 07:

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol:

AT04-08PD-SR2BR