

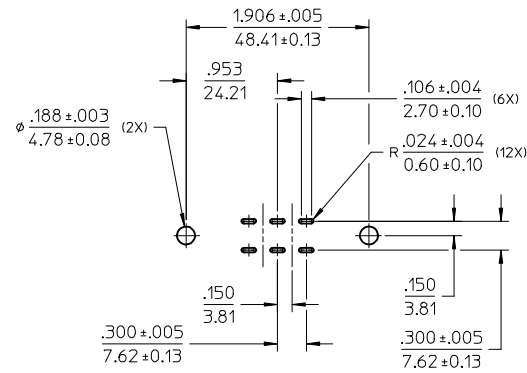


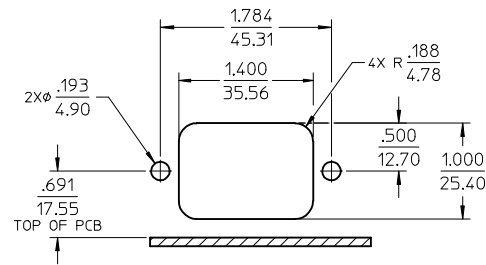


RECOMMENDED PCB LAYOUT
COMPONENT SIDE
TOLERANCES ARE NON-CUMULATIVE

SCALE 1:1


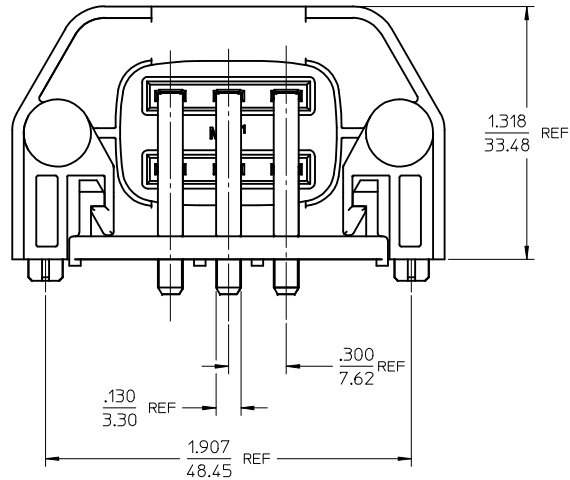


RECOMMENDED PANEL MOUNT OPENING
MAX. PANEL THK .093/2.362

SCALE 1:1

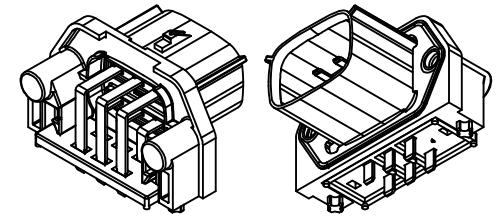

ASSEMBLED VIEW
SCALE 1:1

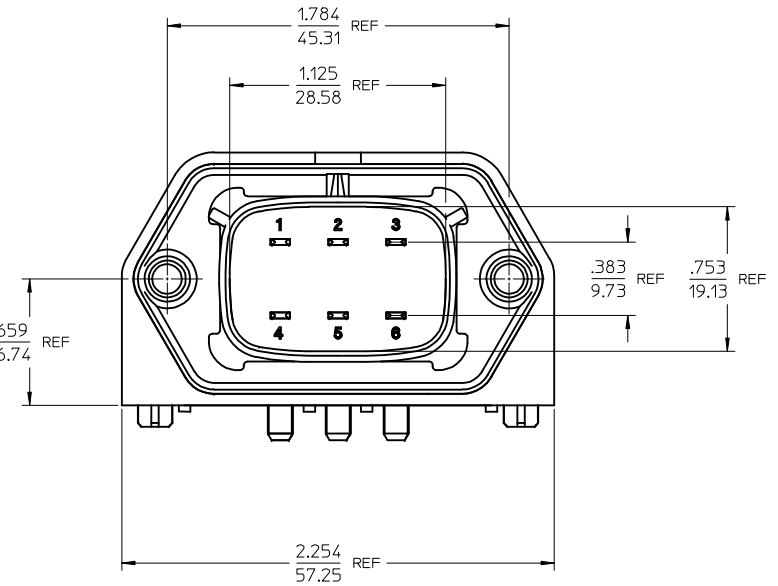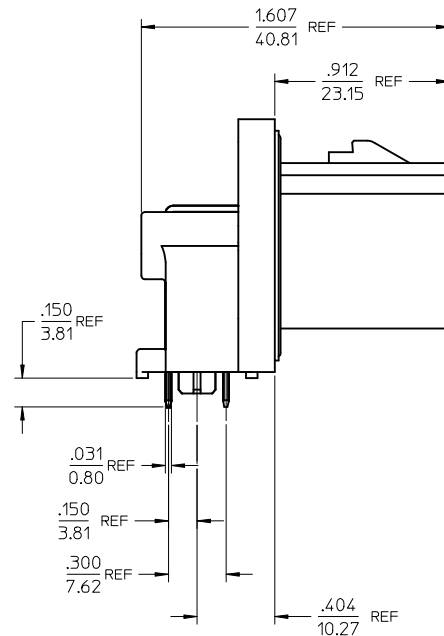

NOTES:

1. MATERIALS:

HOUSING: POLYESTER (PBT), GLASS FILLED, UL94 V-0, COLOR: BLACK
TERMINALS: COPPER ALLOY

2. TERMINAL FINISH: 100µN TIN OVER 50µN NICKEL

3. PRODUCT SPECIFICATION: PS-19432-001

4. PACKAGING SPECIFICATION: PK-19437-001

5. MATES WITH: 19432 SERIES RECEPTACLE ASSEMBLIES.

6. RECOMMENDED MOUNTING HARDWARE: (2) #10 X .62/15.7 LONG PLASTIC THREAD CUTTING SCREWS. RECOMMENDED TORQUE 15-17 IN-LBS.

SUGGESTED SOURCE: ITW SHAKEPROOF INDUSTRIAL BOSSCREW OR EQUIVALENT.

7. ALL MATERIALS ARE ROHS COMPLIANT.

A201526286 EC NO: IPG2015-1818 DRWN: BARDEN CHKD: WLEUNG APPR: JFMURPHY DATE: 2015/04/22 2015/04/30 2015/07/20	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION
				mm	INCH	DRAWN BY BARDEN	DATE 2015/04/22	TITLE MX150L RA HDR ASSY 6 WAY, 12-10-8AWG WITH PANEL GASKET	
			4 PLACES	± ---	± ---	CHECKED BY WLEUNG	DATE 2015/04/30	MOLEX MOLEX INCORPORATED	
			3 PLACES	± ---	± .010	APPROVED BY JFMURPHY	DATE 2015/07/20		
			2 PLACES	± 0.26	± .02	MATERIAL NO. 194370040	DOCUMENT NO. SD-19437-026		
			1 PLACE	± 0.5	± ---	SHEET NO. 1 OF 1			
			ANGULAR ± 3 °		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				
					SIZE C THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[19437-0040](#)