

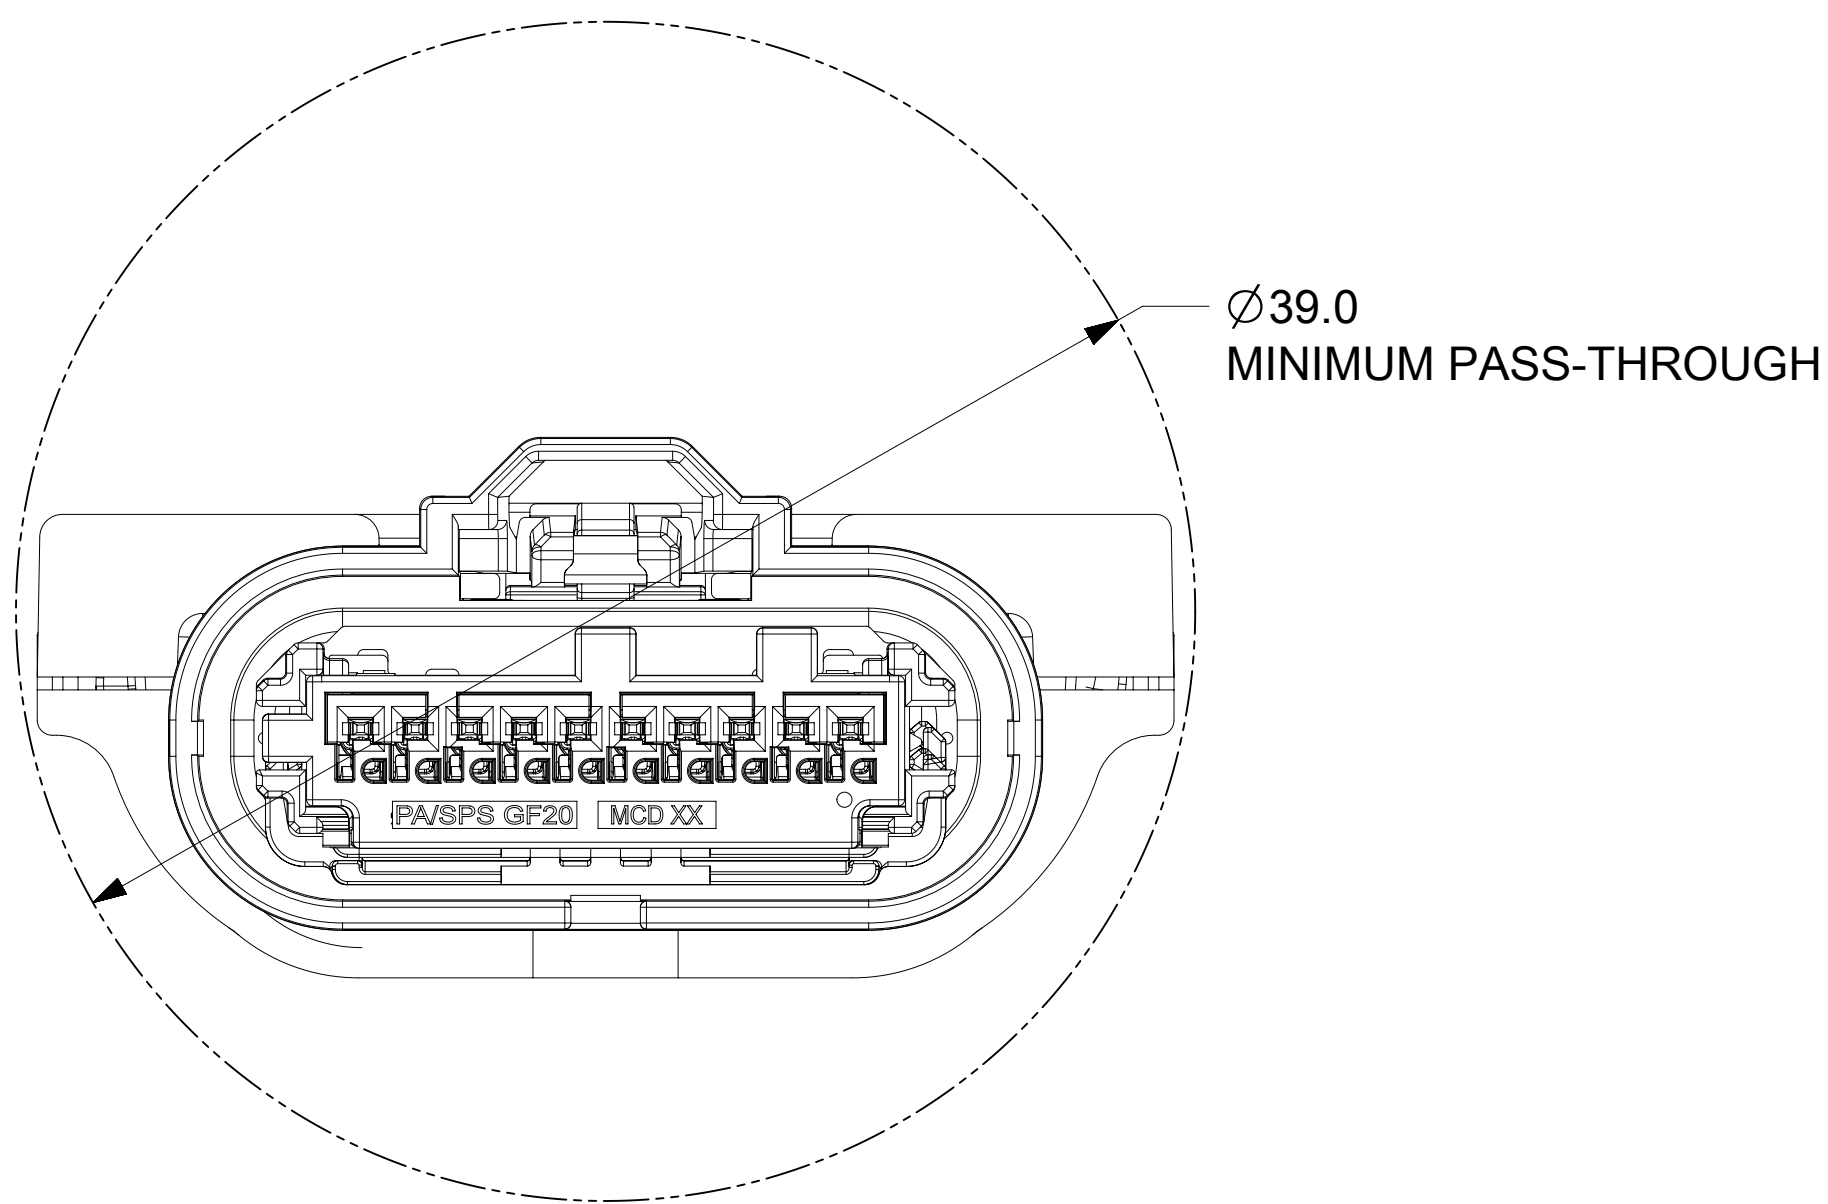
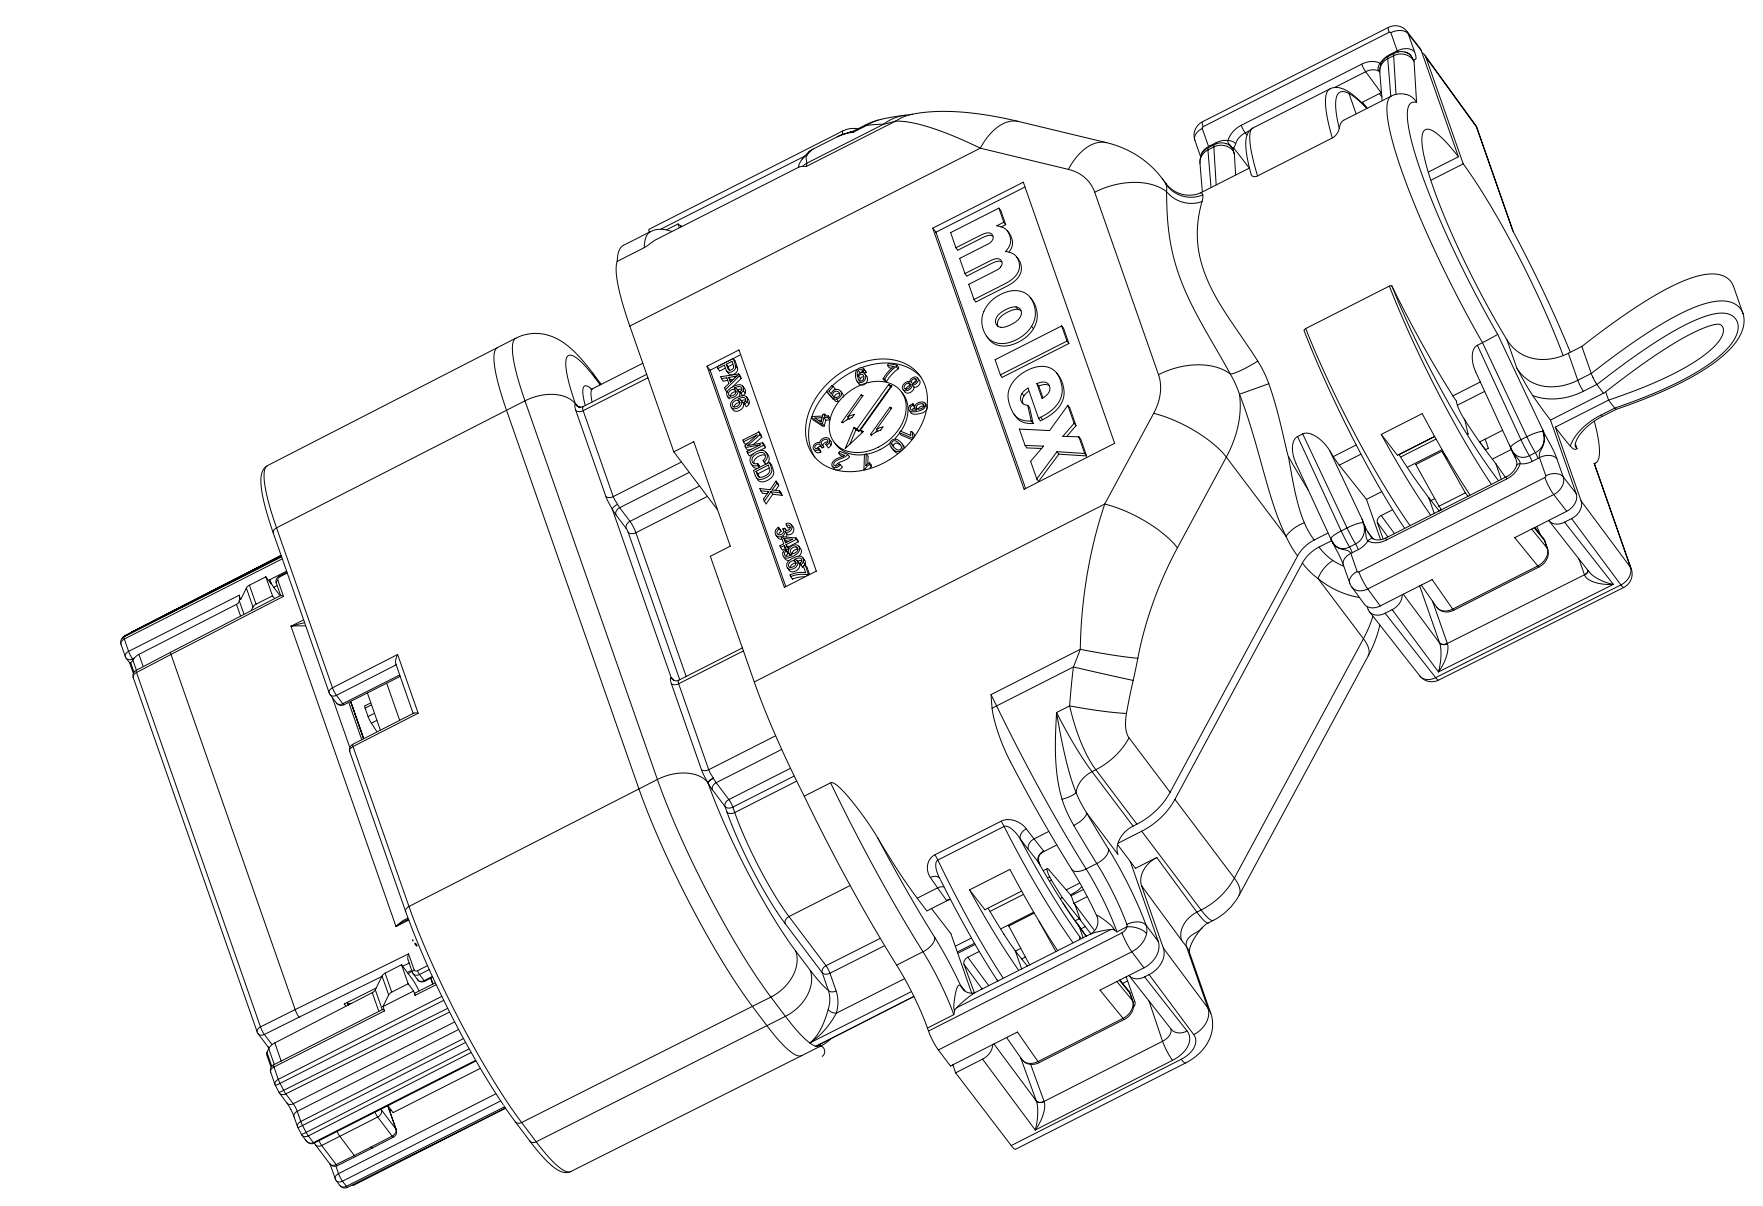


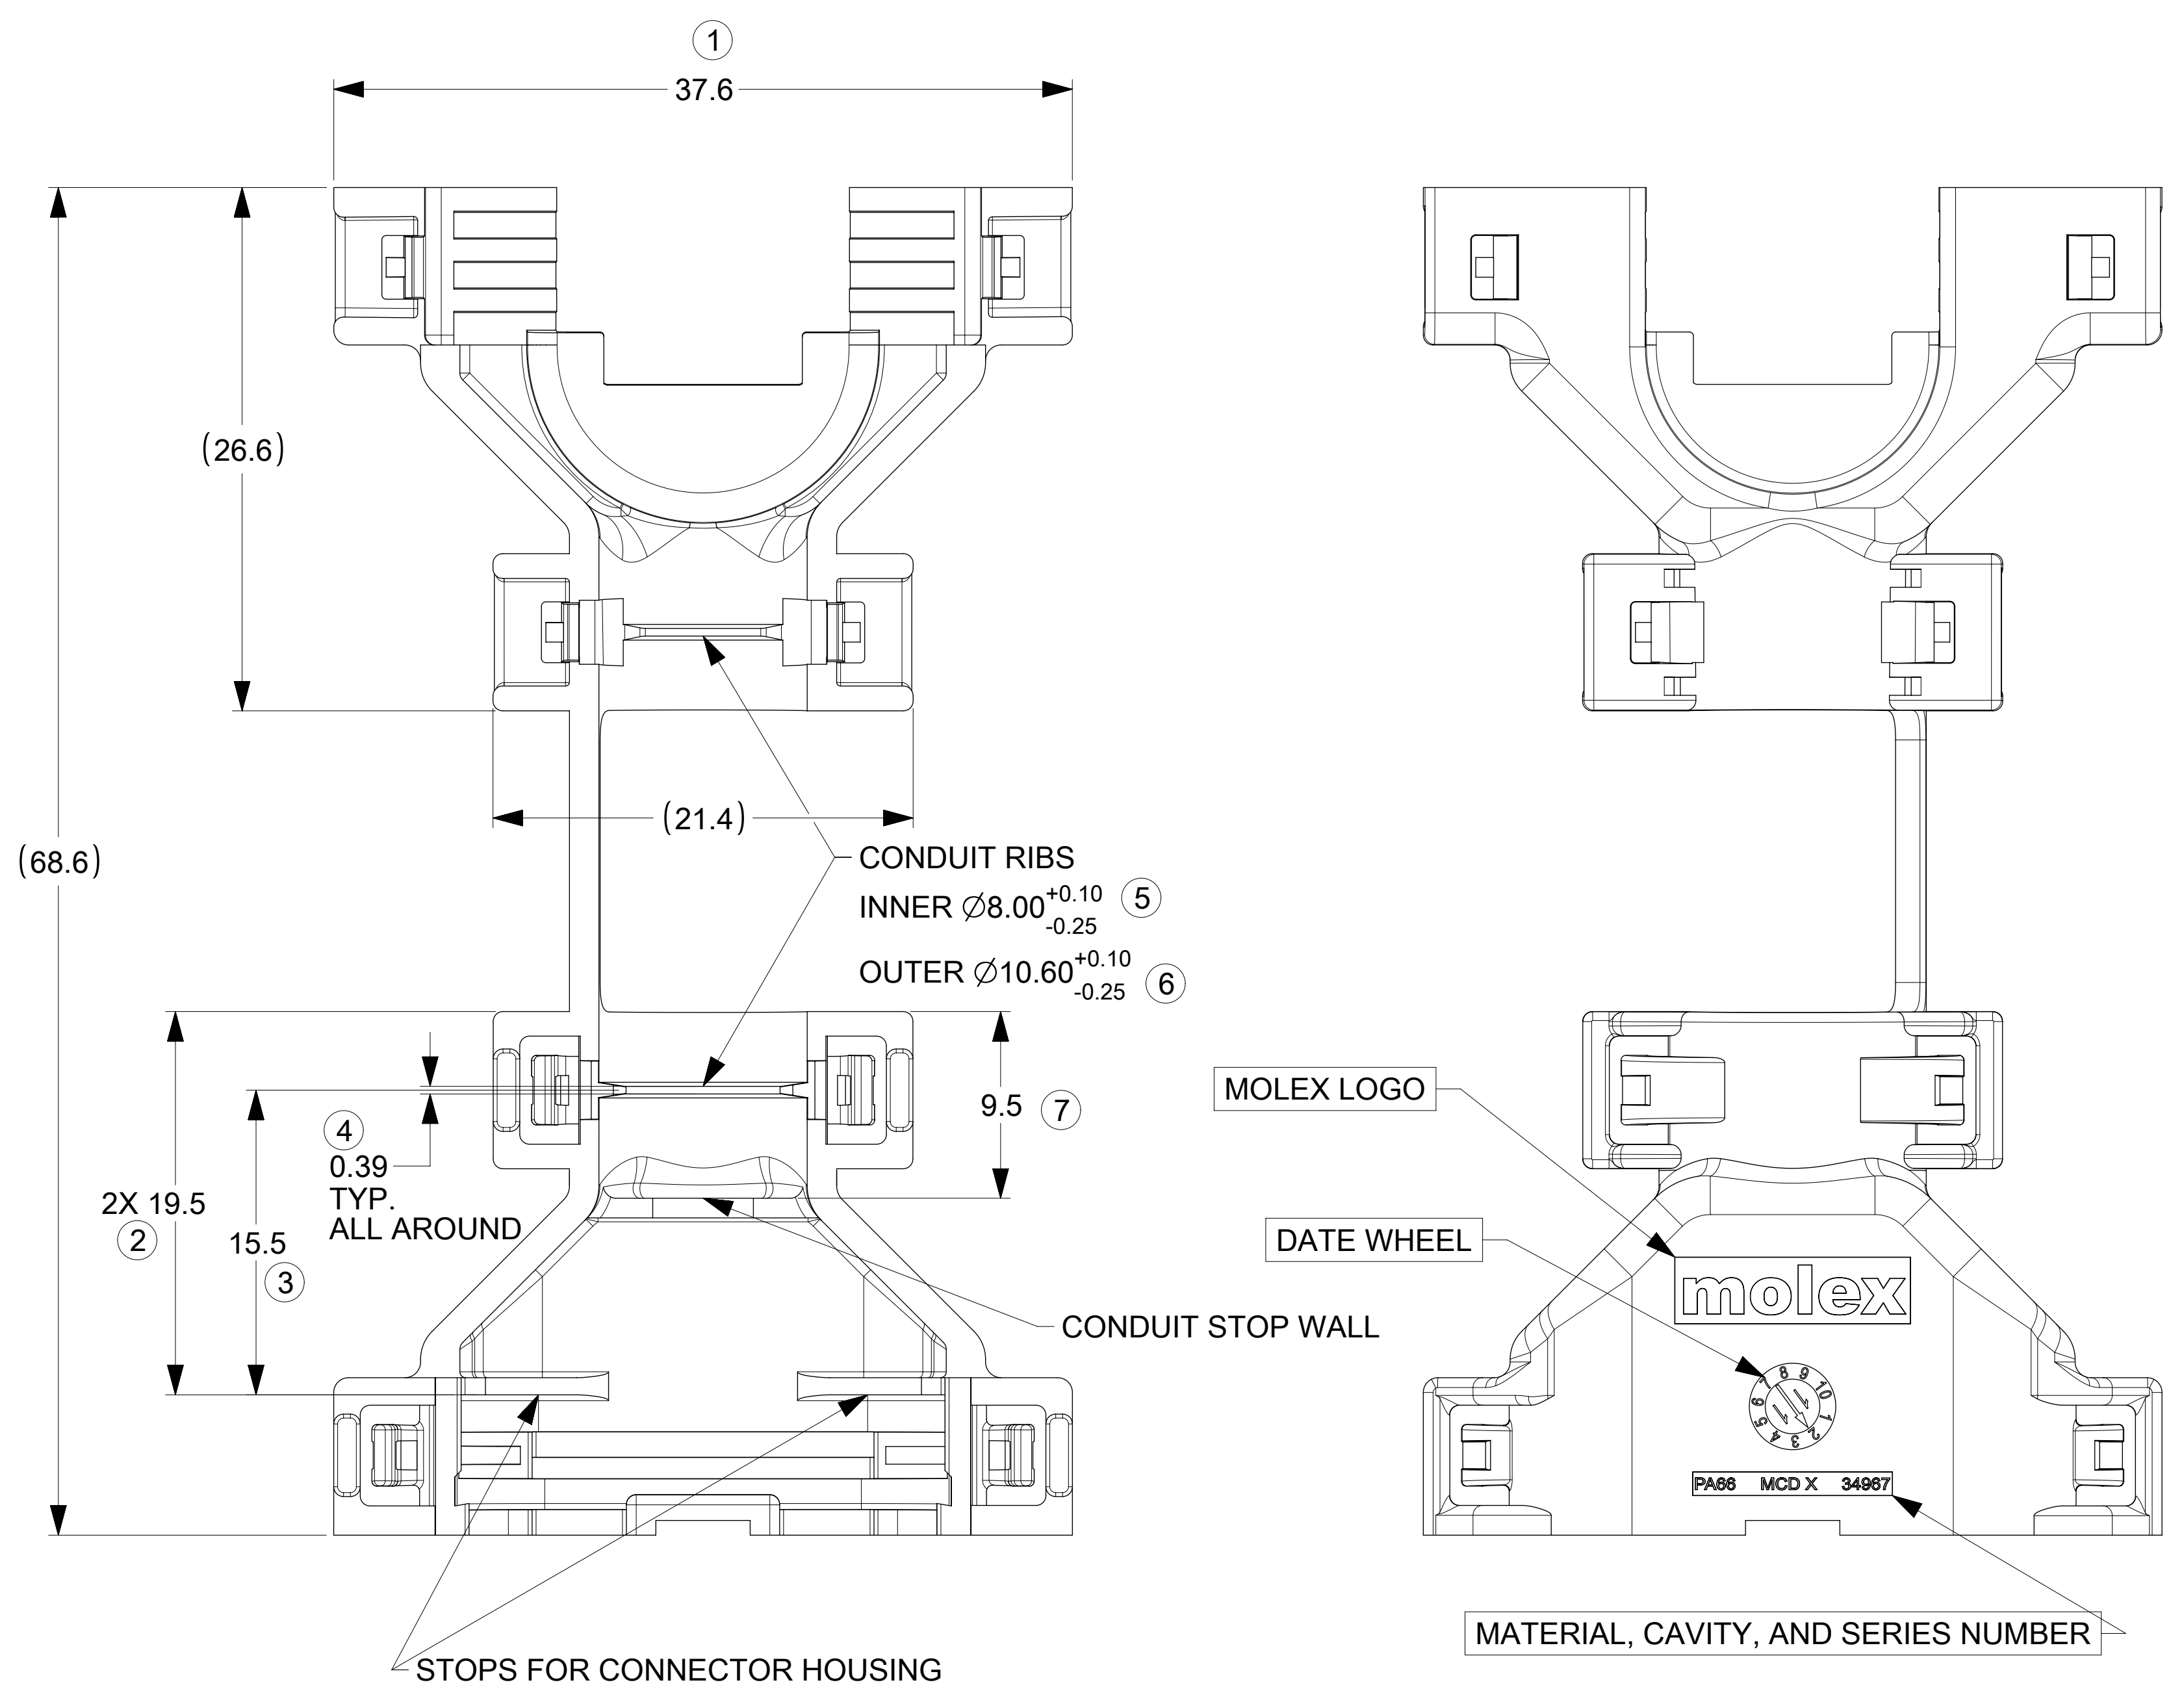

- NOTES: VALID UNLESS OTHERWISE SPECIFIED
- GENERAL:
 - PART IS DESIGNED FOR RECEPTACLE SEALED ASSEMBLY PER MOLEX DRAWING 349671000
 - APPLICATION SPECIFICATION SEE: AS-34894-0001
 - PRODUCT SPECIFICATION SEE: 349670001
 - PACKAGING SPECIFICATION PER MOLEX DRAWING: PK-31301-898
 - PARTS MUST BE IN COMPLIANCE TO MOLEX CHEMICAL SUBSTANCES FOR PRODUCTS AND PACKAGING SPECIFICATION: QEHS-699000-300 (FOR SUPPLIERS) OR QEHS-699000-304 (INTERNAL)
 - DATA MUST BE SUBMITTED UNDER THE MOLEX PART NUMBER TO IMDS (COMPANY ID#13255)
 - FLAMMABILITY REQUIREMENT: PER ISO3795 OR GM3191
 - BURN RATE 100 mm/MIN MAXIMUM
 - MATERIAL MUST BE SELF EXTINGUISHING
 - DESIGN - MATERIALS:
 - MATERIAL: PA66 VYDYNE 22HSP 25% REGRIND MAX BY WEIGHT
COLOR: BLACK PER 899921246
 - VOLUME: 2596 ± 5% (ESTIMATED)
 - DESIGN - GEOMETRY:
 - THE 3-D CAD DATA IS BASIC (WITHOUT TOLERANCE) AND MUST BE TAKEN FROM THE DATA FILE AT ITS LATEST REVISION.
 - THE 3-D CAD DATA IS MASTER FOR THIS PART AND IS TO BE USED TO ESTABLISH DIMENSIONAL INFORMATION NOT SHOWN ON THIS DRAWING. ANY DIMENSIONS UNDERLINED INDICATE A CONFLICT WITH THE MODEL.
 - PRODUCT DESIGN MODEL NUMBER: 349671020
 - GEOMETRIC DIMENSIONS AND TOLERANCES PER ASME Y14.5-2009
 - GENERAL TOLERANCES:
LINEAR: PER TITLE BLOCK
ANGULAR: X.X°±3°
 - EDGES AND UNDIMENSIONED DETAILS PER ISO13715
 - CORNERS SHOWN AS SHARP TO BE R 0.2 MAX.
 - LETTERING SHALL BE 0.15 MAX RAISED IN 0.25 MAX RECESS PAD. THIS INCLUDES RECYCLING CODE, CAVITY ID, VENDOR IDENTIFICATION, AND CUSTOMER MATERIAL NUMBER.
 - DESIGN - MANUFACTURING:
 - ALLOWABLE FLASH MAX 0.25 HIGH BY MAX 0.13 THICK.
 - ALLOWABLE SPLIT/PARTING LINE MISMATCH 0.2 MAX.
 - EJECTOR PIN MARKS TO BE FLUSH TO 0.25 MAX DEPRESSED. LOCATION MUST BE APPROVED BY PRODUCT ENGINEERING. EJECTOR PIN MARKS NOT PERMISSIBLE ON OR NEAR DATUM TARGET AREA.
 - ALLOWABLE GATE VESTIGE FLUSH TO 0.25 MAX PROTRUSION. LOCATION MUST BE APPROVED BY PRODUCT ENGINEERING.
 - VISUAL DEFECTS SHALL MEET COSMETIC STANDARD PS-45499-002 (Class B)
 - NO EXTERNAL MOLD RELEASE AGENT ALLOWED DURING MANUFACTURING

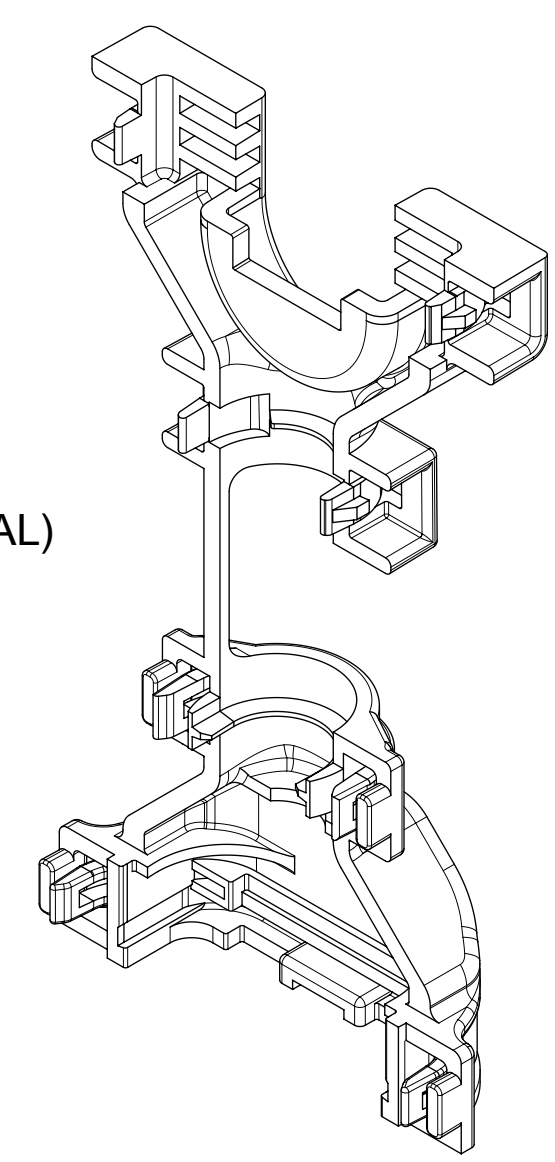

SYMBOLS			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																				
		DIMENSION UNITS		SCALE		CURRENT REV DESC: NEW PN FOR 349671010								molex									
		mm		4:1		EC NO: 604627 DRWN: JRUTTER 2018/09/18 CHK'D: JRUTTER 2018/09/18 APPR: JCONDON 2018/09/19																	
		GENERAL TOLERANCES (UNLESS SPECIFIED)																					
		ANGULAR TOL		±	°	INITIAL REVISION: DRWN: JRUTTER 2018/09/05 APPR: JCONDON 2018/09/06								PRODUCT CUSTOMER DRAWING									
		4 PLACES		±										DOCUMENT NUMBER					DOC TYPE		DOC PART	REVISION	
		3 PLACES		±										349671020-SD					PSD		000	A1	
		2 PLACES		±	0.1																		
		1 PLACE		±	0.2																		
		0 PLACES		±		THIRD ANGLE PROJECTION					DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER			SHEET NUMBER			
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS								D-SIZE		34967		349671020					1 OF 1				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

34967-1020