

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0347084050](#)


Status: **Active**

Overview: [Stac64 Single, Multi-Pocket and Hybrid Header System](#)

Description: Stac64 4 Bay Right-Angle Headers 54 Circuits, Bay A 20 Circuit Signal Header, Polarization B, Gray; Bay B 16 Circuit Signal Header, Polarization A, Black; Bay C 8 Circuit Signal Header, Polarization A, Black; Bay D 10 Circuit Power Header, Polarization A, Black; Tray

Documents:	
3D Model	Application Specification AS-34729-020-001 (PDF)
Drawing (PDF)	Packaging Specification PK-31300-892-001 (PDF)
3D Model (PDF)	Brochure (PDF)
Product Specification PS-31372-100-001 (PDF)	RoHS Certificate of Compliance (PDF)

General	
Product Family	PCB Headers
Series	34708
Application	Automotive, Power, Wire-to-Board
Comments	Bay A 20 Circuits Stac64 Right Angle Signal Header, Polarization B. Bay B 16 Circuits Stac64 Right Angle Signal Header, Polarization A. Bay C 8 Circuits Stac64 Right Angle Signal Header, Polarization A. Bay D 10 Circuits Stac64 Right Angle Power, Polarization A
Overview	Stac64 Single, Multi-Pocket and Hybrid Header System
Product Name	Stac64
UPC	884982259393
Physical	
Breakaway	No
Circuits (Loaded)	54
Circuits (maximum)	54
Color - Resin	Black
Durability (mating cycles max)	10
First Mate / Last Break	No
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Copper Alloy
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	32.203/g
Number of Rows	2
Orientation	Right Angle
PC Tail Length	3.36mm
PCB Locator	Yes
PCB Retention	None
PCB Thickness - Recommended	1.57mm
Packaging Type	Tray
Pitch - Mating Interface	2.30mm, 2.54mm, 2.95mm, 3.50mm
Pitch - Termination Interface	2.30mm, 2.54mm, 2.95mm, 3.50mm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Yes
Stackable	No
Surface Mount Compatible (SMC)	No

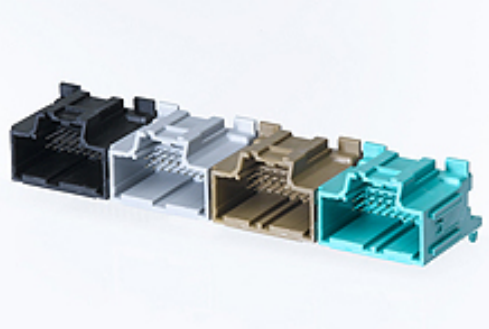

Series image - Reference only

EU ELV	
Compliant	
EU RoHS	China RoHS
Compliant	
REACH SVHC	
Not Contained Per - D(2021)4569-DC (8 July 2021)	
Halogen-Free Status	
Not Relevant	
For more information, please visit Contact US	
China ROHS	Not Relevant
ELV	Compliant
RoHS Phthalates	Not Contained

Search Parts in this Series
[34708](#) Series

Mates With
[31408](#) USCAR 2.54mm (.100") Pitch Receptacle, [31372](#) 5.25mm (.206") Pitch Hybrid Receptacle Assembly, [34729](#) 2.54mm (.100") Pitch Stac64 Right Angle Receptacle

Temperature Range - Operating	-40° to +100°C
Termination Interface: Style	Through Hole
Electrical	
Current - Maximum per Contact	Contact Molex
Voltage - Maximum	500V
Solder Process Data	
Duration at Max. Process Temperature (seconds)	040
Lead-freeProcess Capability	WAVE
Max. Cycles at Max. Process Temperature	003
Process Temperature max. C	260
Material Info	
Reference - Drawing Numbers	
Application Specification	AS-34729-020-001
Packaging Specification	PK-31300-892-001
Product Specification	PS-31372-100-001
Sales Drawing	SD-34708-400-001

This document was generated on 10/06/2021

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

34708-4050