

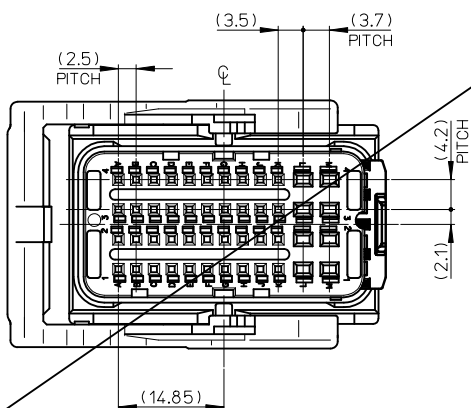
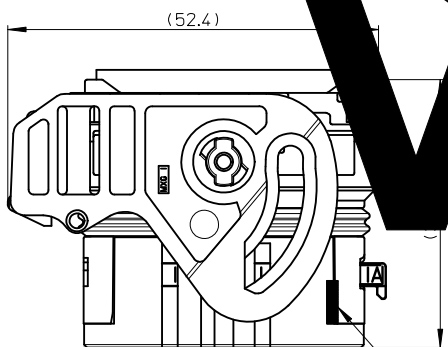


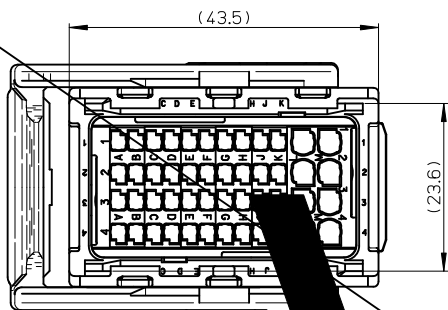

VOID

NOTES




- 適合端子:
APPLICABLE TERMINAL:
信号部 (025 端子)
FOR SIGNAL (025 TERMINAL)
MOX 0.63 TERMINAL 98658-1211
電源部 (060 端子)
FOR POWER SUPPLY (060 TERMINAL)
MOX 0.63 TERMINAL 98195-1211, 98195-1212, 98195-1213
- 適合ワイヤ:
APPLICABLE WIRE: 001
- コネクタの取付、使用方法等については仕様書AS-500993-001を参照下さい。
PLEASE REFER TO APPLICATION SPECIFICATION AS-500993-001 FOR MOUNTING AND USING.

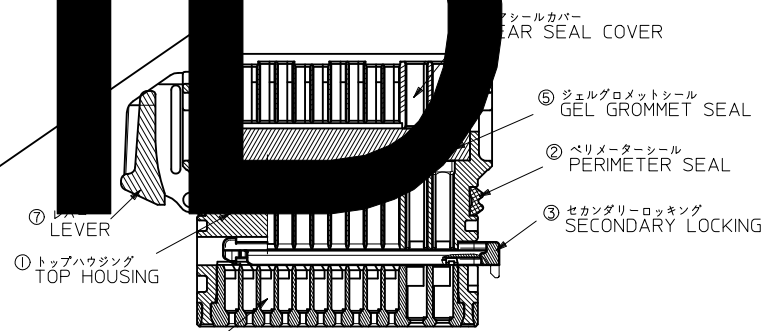

MOVE TO SD-500994-004






左 LEFT	500994-5113	茶 BROWN
	500994-5112	灰 GRAY
	500994-5111	黒 BLACK
右 RIGHT	500994-4113	茶 BROWN
	500994-4112	灰 GRAY
	500994-4111	黒 BLACK
ワイヤ取だし方向(レバー方向) WIRE OUTPUT (LEVER DIRECTION)	型番 MATERIAL NO.	色 COLOR

VOID	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
		10 UNDER	± 0.2	DRAWN BY S. ANDO	DATE 2005/2/21	TITLE CMC REC. ASSY 48PIN (MOX1.5)			
		10 OVER 30 UNDER	± 0.25	CHECKED BY MA. YAMAMOTO	DATE 2005/2/21				
		30 OVER	± 0.3	APPROVED BY A. KANESHIGE	DATE 2005/2/21	MOLEX MOLEX INCORPORATED			
		ANGULAR ±2 °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.	
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-500994-002		1 OF 2	
				SIZE A2		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

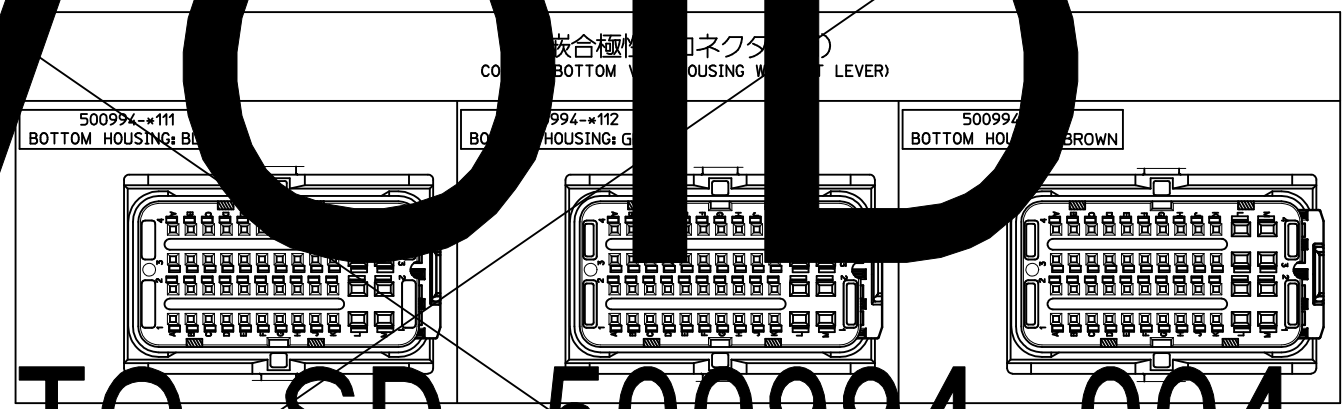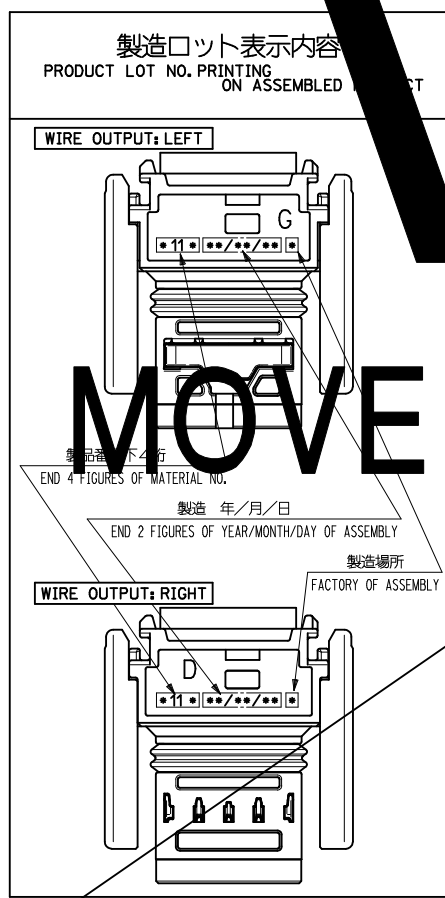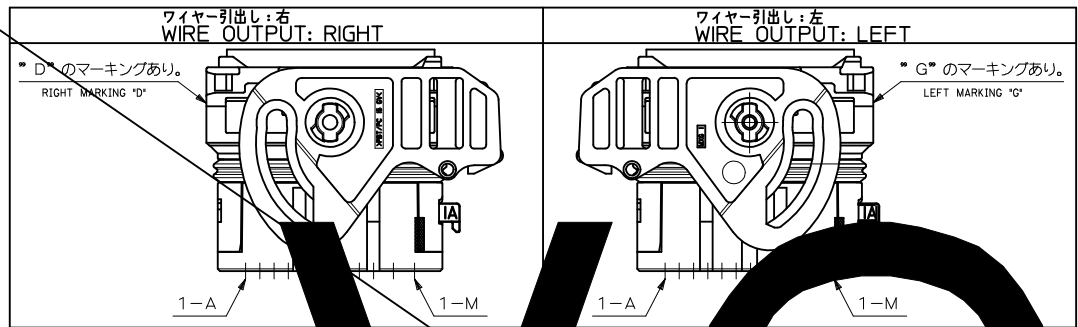

①	トップハウジング TOP HOUSING	シリコン PBT G.F.	黒 BLACK
②	ペリメータースील PERIMETER SEAL	シリコン SILICONE	赤 RED
③	セカンドロッキング SECONDARY LOCKING	ポリエスチル PBT G.F.	緑 GREEN
④	ボトムハウジング BOTTOM HOUSING	ポリエスチル PBT G.F.	SEE CHART(SHEET1)
⑤	ジェルグロメットシール GEL GTOMMET SEAL	シリコン SILICONE	青 BLUE
⑥	リアシールカバー REAR SEAL COVER	ポリエスチル PBT G.F.	橙 ORANGE
⑦	レバー LEVER	ポリエスチル/ポリカーボネート PBT/PC G.F.	灰 GRAY
	部品名 PART NAME	材質 MATERIAL	色 COLOR

VOID EC NO: JTR2010-0118 DRAWN BY: S. ANDO CHKD: MAYAMOTO APPR: MAYAMOTO	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE MM ONLY	SCALE	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
	REV	10 UNDER ±0.2 10 OVER 30 UNDER ±0.25 30 OVER ±0.3 ANGULAR ±2 °	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DRAWN BY: S. ANDO CHECKED BY: MA. YAMAMOTO APPROVED BY: A. KANESHIGE	DATE: 2005/2/21 DATE: 2005/2/21 DATE: 2005/2/21	TITLE: CMC REC. ASSY 48PIN (MOX1.5)
			SEE SHEET NO.1	MATERIAL NO.	DOCUMENT NO.	SHEET NO.

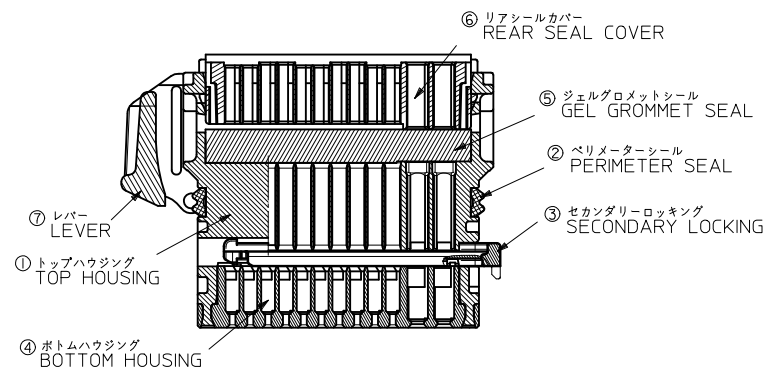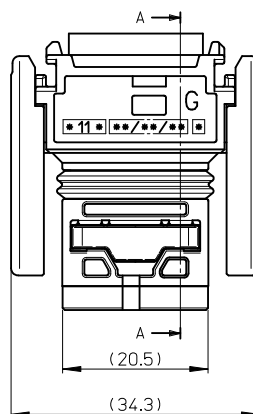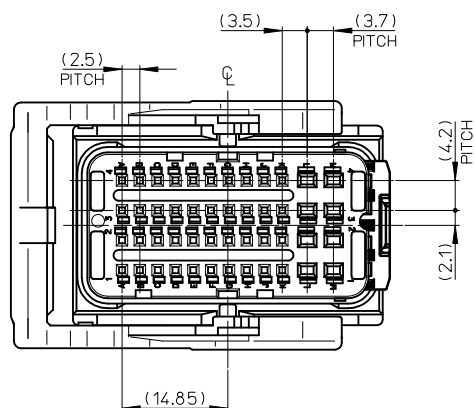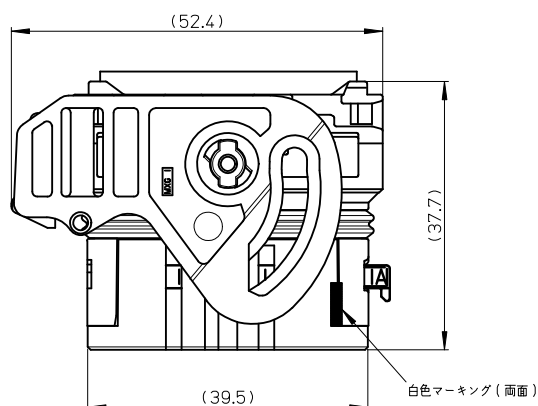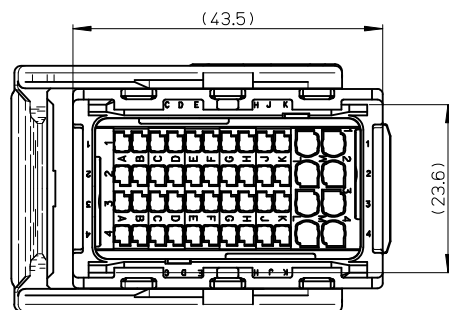




SECTION A-A

注記
NOTES

- 適合端子:
APPLICABLE TERMINAL:
信号部 (025 端子)
FOR SIGNAL (025 TERMINAL)
MOX 0.63 TERMINAL 98658-1211
電源部 (060 端子)
FOR POWER SUPPLY (060 TERMINAL)
MOX 1.5 TERMINAL 98195-1211, 98195-1212, 98195-1213
- 適合ワイヤーキャップ:
APPLICABLE WIRE CAP: 98655-1001
- コネクタの取り扱い、使用方法等についてはアプリケーション仕様書AS-500993-001を参照下さい。
PLEASE REFER TO APPLICATION SPECIFICATION AS-500993-001 FOR HANDLING AND USING.


左 LEFT	500994-5113	茶 BROWN
	500994-5112	灰 GRAY
	500994-5111	黒 BLACK
右 RIGHT	500994-4113	茶 BROWN
	500994-4112	灰 GRAY
	500994-4111	黒 BLACK
ワイヤ取出し方向(レバー方向) WIRE OUTPUT (LEVER DIRECTION)	型番 MATERIAL NO.	色 COLOR

REVISED & REDRAWN EC NO: JTR2010-018 DRWNS: SNAOKA 2010/07/28 CHKD: SANDO 2010/07/29 APPR: MAYAMOTO 2010/08/02	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 2:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
	10 UNDER	± 0.2	DRAWN BY SINAOKA	DATE 2010/07/28	TITLE CMC REC. ASSY 48PIN (MOX1.5)			
	10 OVER 30 UNDER	± 0.25	CHECKED BY SANDO	DATE 2010/07/29				
	30 OVER	± 0.3	APPROVED BY MAYAMAMOTO	DATE 2010/07/30	molex MOLEX INCORPORATED			
	ANGULAR	±2 °	MATERIAL NO.					DOCUMENT NO.
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-500994-004			1 OF 3
	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

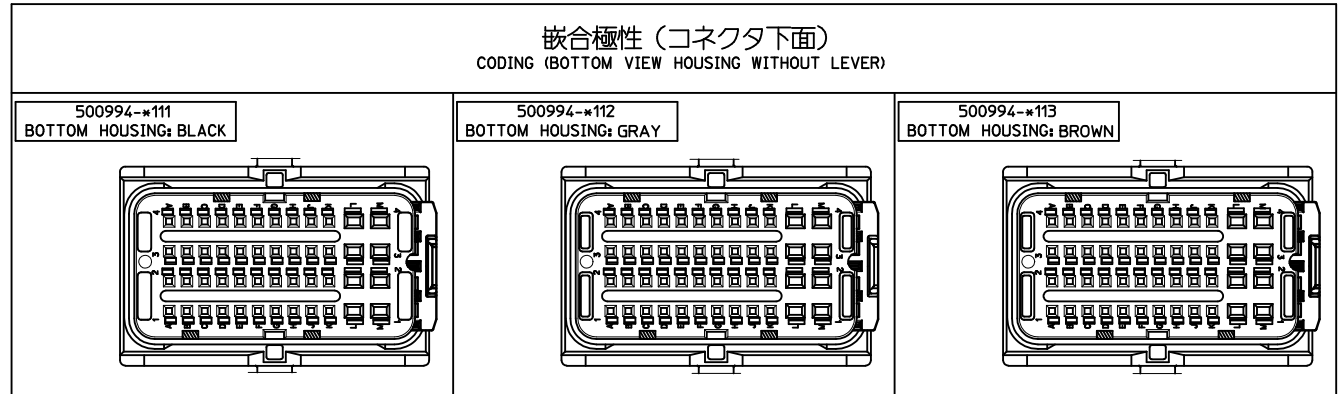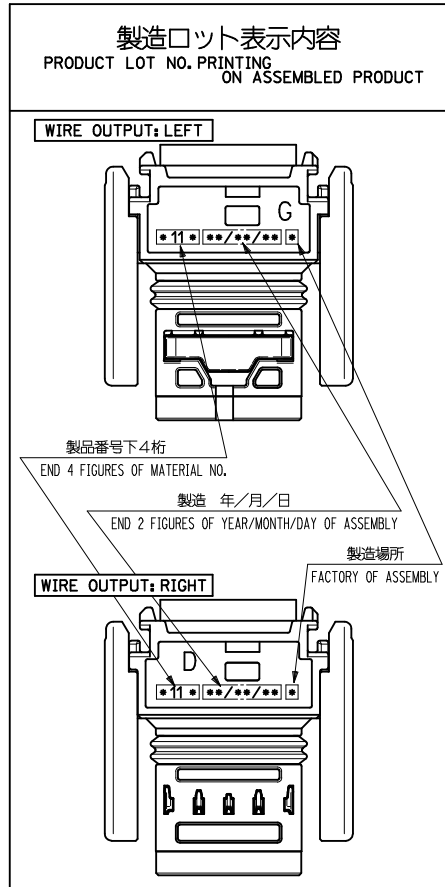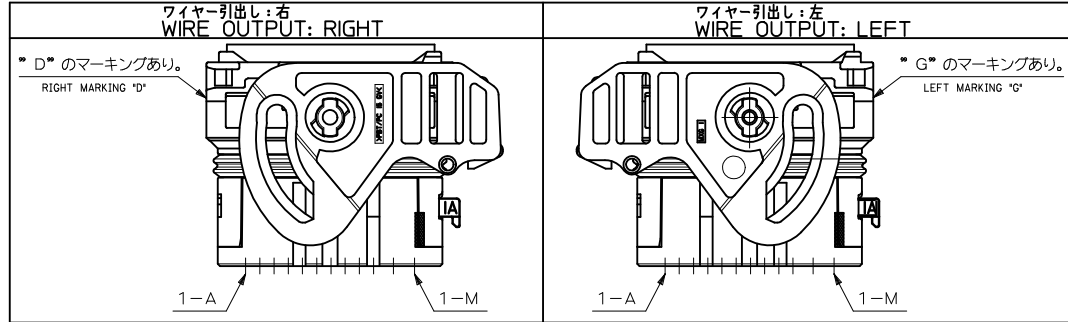

①	トップハウジング TOP HOUSING	ポリエステル ガラス充填 PBT G.F.	黒 BLACK
②	ペリメーターシール PERIMETER SEAL	シリコン SILICONE	赤 RED
③	セカンダリロック SECONDARY LOCKING	ポリエステル ガラス充填 PBT G.F.	緑 GREEN
④	ボトムハウジング BOTTOM HOUSING	ポリエステル ガラス充填 PBT G.F.	SHEET1 表参照 SEE CHART(SHEET1)
⑤	ジェルグロメットシール GEL GTOMMET SEAL	シリコン SILICONE	青 BLUE
⑥	リアシールカバー REAR SEAL COVER	ポリエステル ガラス充填 PBT G.F.	橙 ORANGE
⑦	レバー LEVER	ポリエステル/ポリカーボネート ガラス充填 PBT/PC G.F.	灰 GRAY
	部品名 PART NAME	材質 MATERIAL	色 COLOR

REVISED & REDRAWN EC NO: JTR2010-018 DRAWN: SINAKA 2010/07/28 CHKD: SANDO 2010/07/29 APPR: MAYAMOTO 2010/08/02	DESCRIPTION REV	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	± 0.2	DRAWN BY SINAKA	DATE 2010/07/28	TITLE CMC REC. ASSY 48PIN (MOX1.5)				
		10 OVER 30 UNDER	± 0.25	CHECKED BY SANDO	DATE 2010/07/29					
		30 OVER	± 0.3	APPROVED BY MAYAMOTO	DATE 2010/07/30	MOLEX INCORPORATED				
		ANGULAR	± 2 °	MATERIAL NO.						
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE SHEET NO.1			SD-500994-004			2 OF 3
				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

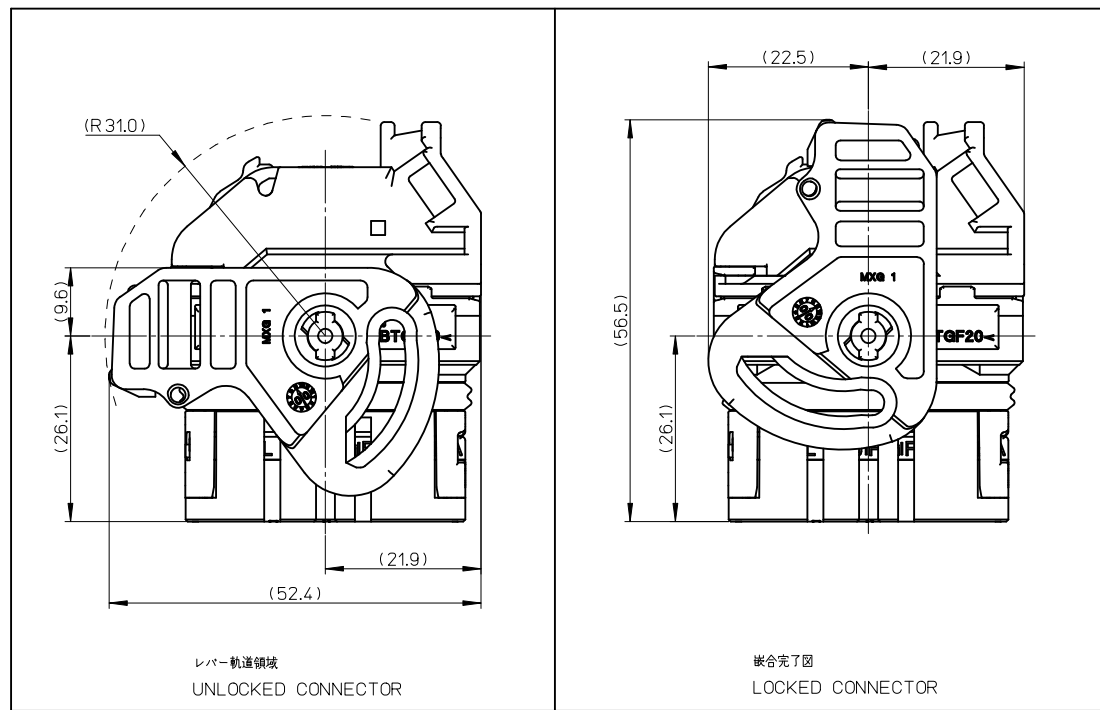

REVISED & REDRAWN EC NO: JTR2010-018 DRAWN: SINAOKA 2010/07/28 CHKD: SANDO 2010/07/29 APPR: MAYAMOTO 2010/08/02	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 2:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
		10 UNDER	± 0.2	DRAWN BY SINAOKA	DATE 2010/07/28	TITLE CMC REC. ASSY 48PIN (MOX1.5)			
		10 OVER 30 UNDER	± 0.25	CHECKED BY SANDO	DATE 2010/07/29				
		30 OVER	± 0.3	APPROVED BY MAYAMOTO	DATE 2010/07/30	MOLEX MOLEX INCORPORATED			
		ANGULAR ±2 °	MATERIAL NO.		DOCUMENT NO.				SHEET NO.
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE SHEET NO.1		SD-500994-004			3 OF 3
				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

500994-4111