

REM2A Series ◊ Regulated DIP16 & SMD

2W ◊ Isolated Single & Dual Output ◊ 2:1 Input


FEATURES

- 2MOPP, 250VAC working voltage isolation
- Clearance and creepage distance $\geq 8\text{mm}$
- Up to 5kVAC/1min reinforced insulation
- IEC/EN/UL 60601 and 62368-1 certified
- -40°C to $+90^{\circ}\text{C}$ operation, no derating
- 2:1 wide input range
- Compact 24.3x14.4mm footprint
- 3 year warranty



Dimensions (LxWxH): 24.3 x 14.4 x 10.2mm (0.95 x 0.57 x 0.40 inch)
7.0g (0.015 lbs)

APPLICATIONS

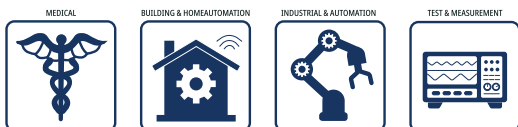

SAFETY & EMC



DESCRIPTION

The REM2A series of medical grade regulated DC/DC converters features reinforced 250VAC continuous working isolation with $\geq 8\text{mm}$ creepage/clearance. The compact DIP16/SMD package offers industry standard pinouts with tightly regulated single/dual outputs and UVLO, SCP, and OVP. The operating ambient temperature range is from -40°C to $+90^{\circ}\text{C}$ without derating. The converters are UL marked and certified to IEC, EN, and ANSI/AAMI 60601 3rd. Ed. Safety and 4th Ed. EMC medical standards as well as IEC, EN, UL 62368-1 IT and multimedia standards. The low $2\mu\text{A}$ leakage current complies with medical applied part for B, BF, and CF rating limits as defined by IEC60601-1.

SELECTION GUIDE

| Part Number | Input Voltage Range [VDC] | Output Voltage nom. [VDC] | Output Current | | Efficiency typ. ⁽¹⁾ [%] | max. Capacitive Load ⁽²⁾ [μF] |
|-----------------------------|---------------------------|---------------------------|----------------|--|------------------------------------|---|
| | | | max. [mA] | | | |
| REM2A-053.3S ⁽³⁾ | 4.5-12 | 3.3 | 600 | | 75 | 1000 |
| REM2A-0505S ⁽³⁾ | 4.5-12 | 05 | 400 | | 78 | 1000 |
| REM2A-0509S ⁽³⁾ | 4.5-12 | 09 | 222 | | 78 | 430 |
| REM2A-0512S ⁽³⁾ | 4.5-12 | 12 | 167 | | 82 | 220 |
| REM2A-0515S ⁽³⁾ | 4.5-12 | 15 | 134 | | 82 | 170 |
| REM2A-0524S ⁽³⁾ | 4.5-12 | 24 | 83 | | 82 | 100 |
| REM2A-0512D ⁽³⁾ | 4.5-12 | ± 12 | ± 83 | | 82 | ± 170 |
| REM2A-0515D ⁽³⁾ | 4.5-12 | ± 15 | ± 67 | | 80 | ± 100 |

REM2A Series \diamond Regulated DIP16 & SMD

2W \diamond Isolated Single & Dual Output \diamond 2:1 Input

SELECTION GUIDE

| Part Number | Input Voltage Range [VDC] | Output Voltage nom. [VDC] | Output Current max. [mA] | Efficiency typ. ⁽¹⁾ [%] | max. Capacitive Load ⁽²⁾ [μ F] |
|-----------------------------|---------------------------|---------------------------|--------------------------|------------------------------------|--|
| | | | | | |
| REM2A-123.3S ⁽³⁾ | 9-18 | 3.3 | 600 | 76 | 1000 |
| REM2A-1205S ⁽³⁾ | 9-18 | 05 | 400 | 78 | 1000 |
| REM2A-1209S ⁽³⁾ | 9-18 | 09 | 222 | 79 | 430 |
| REM2A-1212S ⁽³⁾ | 9-18 | 12 | 167 | 82 | 220 |
| REM2A-1215S ⁽³⁾ | 9-18 | 15 | 134 | 82 | 170 |
| REM2A-1224S ⁽³⁾ | 9-18 | 24 | 83 | 81 | 100 |
| REM2A-1212D ⁽³⁾ | 9-18 | \pm 12 | \pm 83 | 81 | \pm 170 |
| REM2A-1215D ⁽³⁾ | 9-18 | \pm 15 | \pm 67 | 81 | \pm 100 |
| REM2A-243.3S ⁽³⁾ | 18-36 | 3.3 | 600 | 76 | 1000 |
| REM2A-2405S ⁽³⁾ | 18-36 | 05 | 400 | 79 | 1000 |
| REM2A-2409S ⁽³⁾ | 18-36 | 09 | 222 | 80 | 430 |
| REM2A-2412S ⁽³⁾ | 18-36 | 12 | 167 | 81 | 220 |
| REM2A-2415S ⁽³⁾ | 18-36 | 15 | 134 | 81 | 170 |
| REM2A-2424S ⁽³⁾ | 18-36 | 24 | 83 | 81 | 100 |
| REM2A-2412D ⁽³⁾ | 18-36 | \pm 12 | \pm 83 | 81 | \pm 170 |
| REM2A-2415D ⁽³⁾ | 18-36 | \pm 15 | \pm 67 | 81 | \pm 100 |
| REM2A-483.3S ⁽³⁾ | 36-75 | 3.3 | 600 | 76 | 1000 |
| REM2A-4805S ⁽³⁾ | 36-75 | 05 | 400 | 78 | 1000 |
| REM2A-4809S ⁽³⁾ | 36-75 | 09 | 222 | 79 | 430 |
| REM2A-4812S ⁽³⁾ | 36-75 | 12 | 167 | 80 | 220 |
| REM2A-4815S ⁽³⁾ | 36-75 | 15 | 134 | 82 | 170 |
| REM2A-4824S ⁽³⁾ | 36-75 | 24 | 83 | 81 | 100 |
| REM2A-4812D ⁽³⁾ | 36-75 | \pm 12 | \pm 83 | 81 | \pm 170 |
| REM2A-4815D ⁽³⁾ | 36-75 | \pm 15 | \pm 67 | 81 | \pm 100 |

Note1: Efficiency is tested at minimum input and full load at +25°C ambient

Note2: Max Cap Load is tested at nominal input an full resistive load

MODEL NUMBERING



Note3: without suffix (THT)= DIP16 type

with suffix "/SMD"= for SMD package

BASIC CHARACTERISTICS (measured @ T_{AMB}= 25°C, nom. V_{IN}, full load and after warm-up unless otherwise stated)

| Parameter | Condition | Min. | Typ. | Max. |
|-----------------------|------------------------------|------------------------------|-------|-----------|
| Internal Input Filter | | | | capacitor |
| Input Voltage Range | nom. V _{IN} = 5VDC | 4.5VDC | 5VDC | 12VDC |
| | nom. V _{IN} = 12VDC | 9VDC | 12VDC | 18VDC |
| | nom. V _{IN} = 24VDC | 18VDC | 24VDC | 36VDC |
| | nom. V _{IN} = 48VDC | 36VDC | 48VDC | 75VDC |
| Input Surge Voltage | 1 sec. max | nom. V _{IN} = 5VDC | | 15VDC |
| | | nom. V _{IN} = 12VDC | | 25VDC |
| | | nom. V _{IN} = 24VDC | | 50VDC |
| | | nom. V _{IN} = 48VDC | | 100VDC |

REM2A Series \diamond Regulated DIP16 & SMD

2W \diamond Isolated Single & Dual Output \diamond 2:1 Input


BASIC CHARACTERISTICS (measured @ $T_{AMB}= 25^{\circ}C$, nom. V_{IN} , full load and after warm-up unless otherwise stated)

| Parameter | Condition | | Min. | Typ. | Max. |
|------------------------------|------------------------|-----------|------------------------|---------|--------|
| Under Voltage Lockout (UVLO) | nom. $V_{IN}= 5VDC$ | DC-DC ON | | | 4.5VDC |
| | | DC-DC OFF | 2VDC | 3VDC | 4VDC |
| | nom. $V_{IN}= 12VDC$ | DC-DC ON | | | 9VDC |
| | | DC-DC OFF | 6VDC | 7VDC | 8VDC |
| | nom. $V_{IN}= 24VDC$ | DC-DC ON | | | 18VDC |
| | | DC-DC OFF | 13VDC | 15VDC | 17VDC |
| nom. $V_{IN}= 48VDC$ | DC-DC ON | | | 36VDC | |
| | DC-DC OFF | 29VDC | 32VDC | 35VDC | |
| Start-up Time | power up / CTRL ON/OFF | | 10ms | | 20ms |
| ON/OFF CTRL ⁽⁴⁾ | DC-DC ON | | open or high impedance | | |
| | DC-DC OFF | | 2mA | 3mA | 4mA |
| Input Current on CTRL Pin | DC-DC OFF | | | 2.5mA | |
| Internal Operating Frequency | | | 100kHz | | |
| Output Ripple and Noise | measured by 20MHz BW | | | 50mVp-p | |


Note4: The pin voltage is referenced to -Vin pin and CTRL pin applied current

REM2A-1205S

Efficiency vs. Load

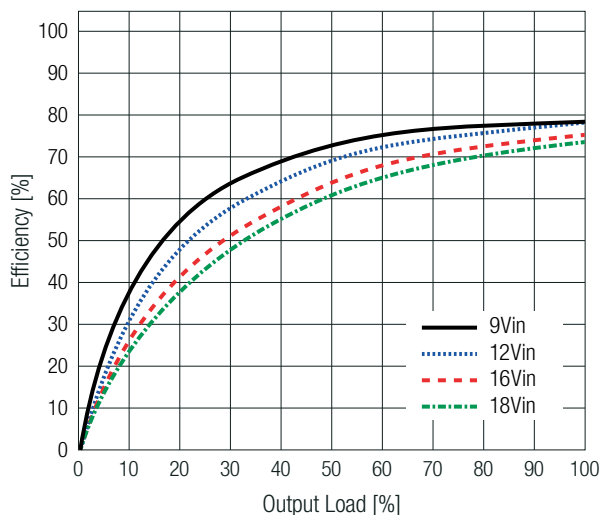


Power Dissipation vs Load

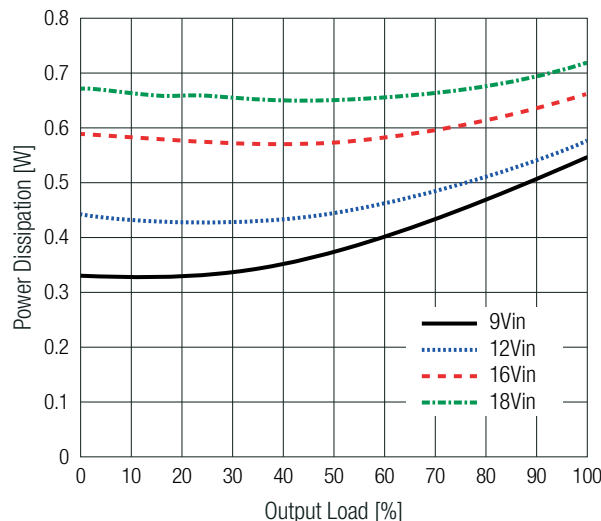


REM2A-2412S

Efficiency vs. Load

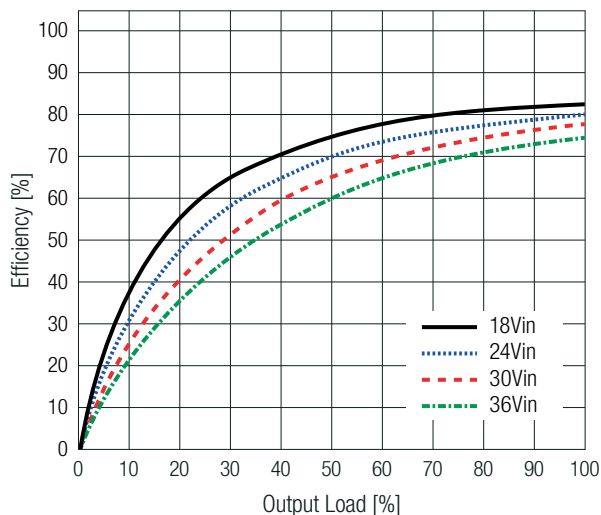

Power Dissipation vs Load

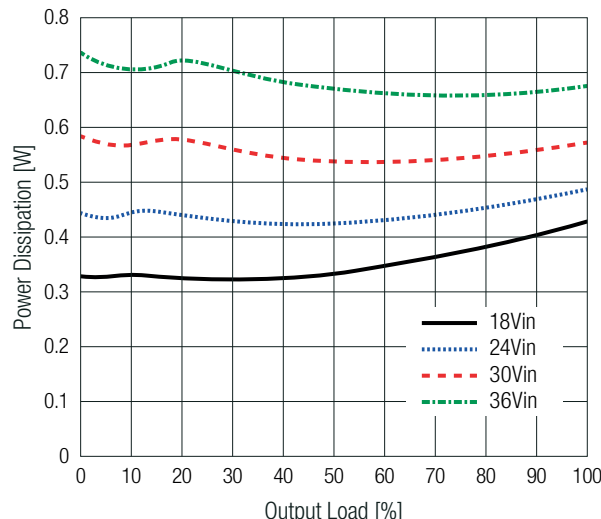


REM2A Series \diamond Regulated DIP16 & SMD

2W \diamond Isolated Single & Dual Output \diamond 2:1 Input


BASIC CHARACTERISTICS (measured @ $T_{AMB} = 25^{\circ}C$, nom. V_{IN} , full load and after warm-up unless otherwise stated)

REM2A-4805S


Efficiency vs. Load

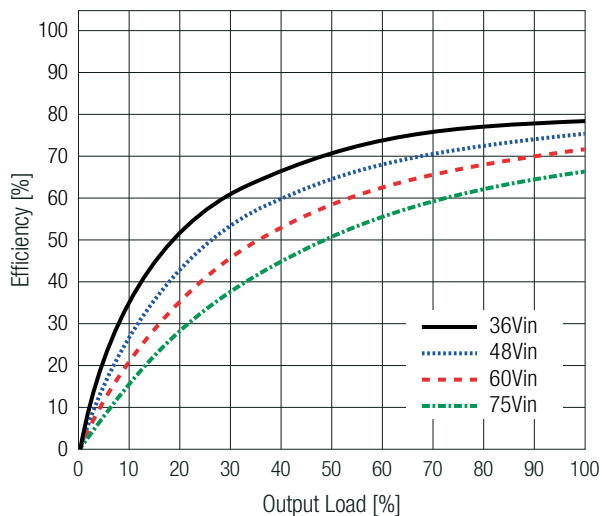


Power Dissipation vs Load

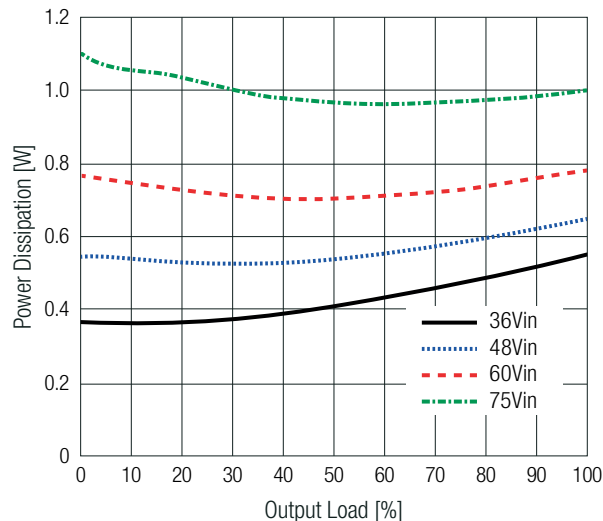

ON/OFF CTRL

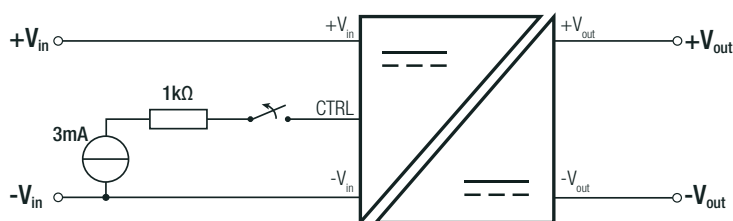

DC-DC ON: Open or high impedance

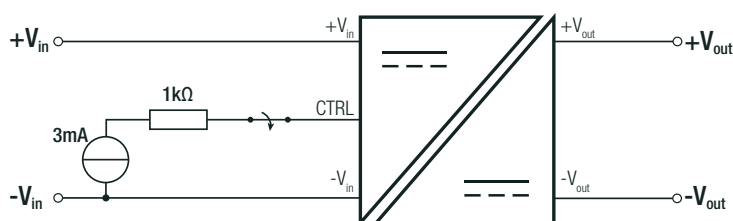

DC-DC OFF: 2mA min. / 3mA typ. / 4mA max.

REGULATIONS

| Parameter | Condition | | Value |
|--------------------|-----------------------------------|------------------|------------------|
| Output Accuracy | | | $\pm 1.0\%$ max. |
| Line Regulation | low line to high line, full load | | $\pm 0.2\%$ max. |
| Load Regulation | 0-100% load | single | $\pm 1.0\%$ max. |
| | | dual | $\pm 1.0\%$ max. |
| | 10-90% load | single | $\pm 0.5\%$ max. |
| | | dual | $\pm 0.8\%$ max. |
| Cross Regulation | asymmetrical load 25% / full load | dual output only | $\pm 5.0\%$ max. |
| Transient Response | recovery time | | 500 μ s max. |

REM2A Series ◊ Regulated DIP16 & SMD

2W ◊ Isolated Single & Dual Output ◊ 2:1 Input

PROTECTIONS

| Parameter | Condition | | Value |
|----------------------------------|---|-------------------|---------------------------|
| Input Fuse ⁽⁶⁾ | external | | refer to below table |
| Short Circuit Protection (SCP) | | | continuous, auto recovery |
| Over Voltage Protection (OVP) | clamping mode | $V_{OUT}= 3.3VDC$ | 4-6.5VDC |
| | | $V_{OUT}= 5VDC$ | 6-8VDC |
| | | $V_{OUT}= 9VDC$ | 10-14VDC |
| | | $V_{OUT}= 12VDC$ | 13-19VDC |
| | | $V_{OUT}= 15VDC$ | 16-22VDC |
| | | $V_{OUT}= 24VDC$ | 25-35VDC |
| Isolation Voltage ⁽⁷⁾ | I/P to O/P, according to 60601-1, 62368-1 | 1 minute | 5kVAC |
| Isolation Resistance | I/P to O/P, $V_{ISO}= 500VDC$ | | 10GΩ min. |
| Isolation Capacitance | I/P to O/P | | 16pF typ. / 20pF max. |
| Insulation Grade | | | reinforced |
| Leakage Current | 240VAC/60Hz | | 2μA max. |
| Means of Protection | 250VAC working voltage | | 2MOPP |
| Medical Device Classification | | | built-in power supply |
| Internal Clearance and Creepage | I/P to O/P | | ≥8mm |

Note7: For repeat Hi-Pot testing, reduce the time and/or the test voltage

Note8: Refer to local safety regulations if input over-current protections is also required. Recommended fuse:


| Modules | Fuse Rating [A] | Fuse Type |
|------------|-----------------|-----------|
| REM2A-05xx | 1 | slow-blow |
| REM2A-12xx | 0.5 | |
| REM2A-24xx | 0.315 | |
| REM2A-48xx | 0.16 | |

ENVIRONMENTAL

| Parameter | Condition | | Value |
|---------------------------------|--|---------------------------|------------------------------|
| Operating Temperature Range | with derating and natural convection 0.1 m/s | refer to „Derating Graph“ | -40°C to +105°C |
| Maximum Case Temperature | | | +105°C |
| Temperature Coefficient | | | ±0.02%/°C |
| Operating Altitude | | | 5000m |
| Operating Humidity | non-condensing | | 5-95% RH max. |
| Pollution Degree | | | PD2 |
| Shock, Thermal Shock, Vibration | | | MIL-STD-810F |
| MTBF | according to MIL-HDBK-217F, G.B. | $T_{AMB}= 25°C$ | 6809 x 10 ³ hours |

Derating Graph

(@ Chamber and natural convection 0.1m/s)

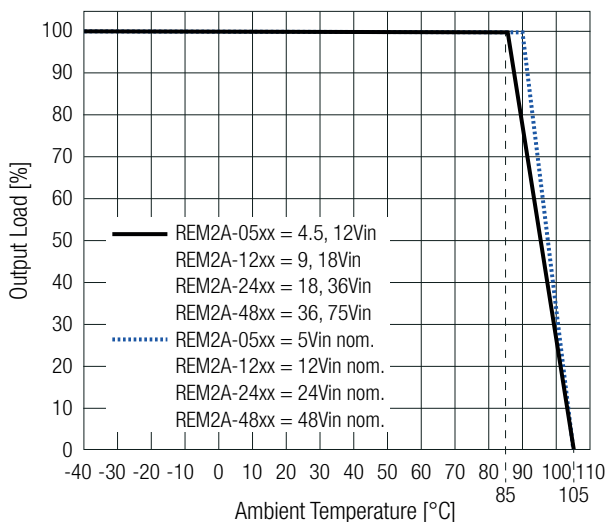

REM2A Series ◊ Regulated DIP16 & SMD

2W ◊ Isolated Single & Dual Output ◊ 2:1 Input

SAFETY AND CERTIFICATION

| Certificate Type (Safety) | Report Number | Standard |
|--|---------------|--|
| Audio/video, information and communication technology equipment. Safety requirements | T01-2402024 | IEC62368-1:2018 3rd Edition |
| Audio/video, information and communication technology equipment. Safety requirements (LVD) | | EN IEC 62368-1:2020+A11:2020 |
| Audio/video, information and communication technology equipment-Part1: Safety requirements | E196683 | UL62368-1:2019 3rd Edition CAN/CSA-C22.2 No. 62368-1-19 3rd Edition |
| Medical electrical equipment Part 1: General requirements for basic safety and essential performance | E314885 | ANSI/AAMI ES60601-1:2005+A2:2010/(R)2012 CAN/CSA-C22.2 No. 60601-1:14 3rd Ed. |
| Medical electrical equipment Part 1: General requirements for basic safety and essential performance | T01-2402025 | IEC60601-1:2005+AM1:2012 Edition 3.1 |
| | | EN60601-1:2006+A12:2014 |
| RoHS2 | | RoHS 2011/65/EU + AM2015/863 |

| EMC Compliance according to EN60601-1-2 | Condition | Standard / Criterion |
|--|--|---|
| Medical electrical equipment Part 1-2: General requirements for basic safety and essential performance | | IEC60601-1-2:2014+A1:2020 Edition 4.1 EN60601-1-2:2015+A1:2021 |
| Industrial, scientific and medical equipment - Radio-frequency disturbance characteristics - Limits and methods of measurement | with external filter | EN55011:2016+A11:2020, Class B |
| ESD Electrostatic discharge immunity test | Air: ±2, 4, 8, 15kV, Contact: ±2, 4, 8kV | IEC61000-4-2:2008 EN61000-4-2:2009 |
| Radiated, radio-frequency, electromagnetic field immunity test | 10V/m (80-2700MHz) | EN IEC 61000-4-3:2020 |
| Fast Transient and Burst Immunity ⁽⁹⁾ | DC Power Port: ±2kV | IEC/EN61000-4-4:2012 |
| Surge Immunity ⁽⁹⁾ | DC Power Port: ±0.5, 1kV | IEC/EN61000-4-5:2014+A1:2017 |
| Immunity to conducted disturbances, induced by radio-frequency fields | 3, 6V (0.15-80MHz) 6V (ISM bands) 6V (amateur radio bands) | IEC61000-4-6:2013 EN61000-4-6:2014+AC:2015 |
| Power Magnetic Field Immunity | 30A/m, 100A/m | IEC61000-4-8:2009 EN61000-4-8:2010 |
| Testing and measurement techniques - Radiated fields in close proximity - Immunity test | 30kHz, 8A/m 134.2kHz, 65A/m 13.56MHz, 7.5A/m | IEC61000-4-39 |

| EMC Compliance according to EN55032/35 | Condition | Standard / Criterion |
|---|--|---|
| Electromagnetic compatibility of multimedia equipment – Emission Requirements | with external filter | EN55032:2015+A11:2020, Class A, B |
| Electromagnetic compatibility of multimedia equipment – Immunity requirements | | EN55035:2017+A11:2020 |
| ESD Electrostatic discharge immunity test | Air: ±2, 4, 8, 15kV, Contact: ±2, 4, 6, 8kV | IEC61000-4-2:2008, Criteria A EN61000-4-2:2009, Criteria A |
| Radiated, radio-frequency, electromagnetic field immunity test | 10V/m (80-1000MHz) 10V/m (1800, 2600, 3500, 5000MHz) | EN IEC 61000-4-3:2020, Criteria A |
| Fast Transient and Burst Immunity ⁽⁹⁾ | DC Power Port: ±2kV | IEC/EN61000-4-4:2012, Criteria A |
| Surge Immunity ⁽⁹⁾ | DC Power Port: ±1kV | IEC/EN61000-4-5:2014+A1:2017, Criteria A |
| Immunity to conducted disturbances, induced by radio-frequency fields | 3Vrms (0.15-10MHz) 3-1Vrms (10-30MHz) 1Vrms (30-80MHz) | IEC61000-4-6:2013, Criteria A EN61000-4-6:2014, Criteria A |
| Power Magnetic Field Immunity | 50/60Hz, 100A/m 50Hz, 1000A/m | IEC61000-4-8:2009, Criteria A EN61000-4-8:2010, Criteria A |

| EMC Compliance according to EN61204-3 | Condition | Standard / Criterion |
|---|--|--|
| Low voltage power supplies, d.c. output Part 3: Electromagnetic compatibility | with external filter | EN61204-3:2000, Class A, B |
| ESD Electrostatic discharge immunity test | Air: ±2, 4, 8, 15kV, Contact: ±2, 4, 6, 8kV | IEC61000-4-2:2008 EN61000-4-2:2009 |
| Radiated, radio-frequency, electromagnetic field immunity test | 10V/m (80-1000MHz) | EN IEC 61000-4-3:2020, Criteria A |
| Fast Transient and Burst Immunity ⁽⁹⁾ | DC Power Port: ±2kV | IEC/EN61000-4-4:2012, Criteria A |
| Surge Immunity ⁽⁹⁾ | DC Power Port: ±1kV | IEC/EN61000-4-5:2014+A1:2017, Criteria A |
| Immunity to conducted disturbances, induced by radio-frequency fields | 3Vrms (0.15-10MHz) 3-1Vrms (10-30MHz) 1Vrms (30-80MHz) | IEC61000-4-6:2013; EN61000-4-6:2014 |


REM2A Series \diamond Regulated DIP16 & SMD

2W \diamond Isolated Single & Dual Output \diamond 2:1 Input

SAFETY AND CERTIFICATION

Fast Transient / Surge


Note9: An external input filter capacitor is required if the module has to meet EN61000-4-4 and EN61000-4-5

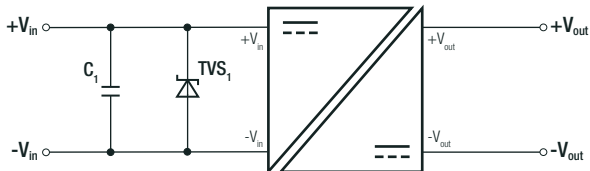

Component List


| Model | C1 | TVS |
|------------|------------------|----------|
| REM2A-05xx | 1000 μ F/25V | 18V/400W |
| REM2A-12xx | 470 μ F/50V | N/A |
| REM2A-24xx | 470 μ F/50V | N/A |
| REM2A-48xx | 220 μ F/100V | N/A |

EMC Filtering Suggestions

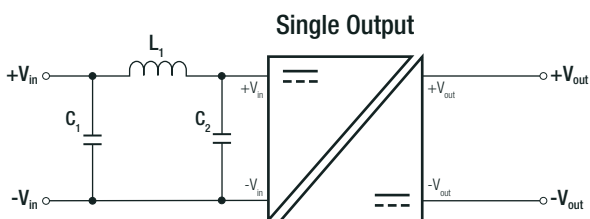

Component List Class A

| Model | C1 | L1 | C2 |
|------------|-------------|-------------|-----|
| REM2A-05xx | 22 μ F | 3.3 μ H | N/A |
| REM2A-12xx | 10 μ F | 10 μ H | N/A |
| REM2A-24xx | 10 μ F | 15 μ H | N/A |
| REM2A-48xx | 2.2 μ F | 68 μ H | N/A |

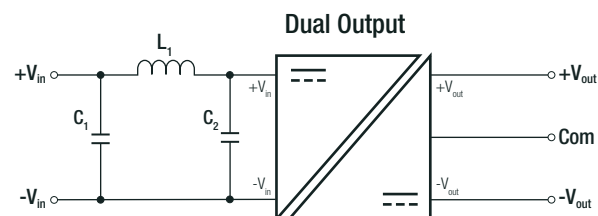

Component List Class B

| Model | C1 | L1 | C2 |
|------------|-------------|-------------|-------------|
| REM2A-05xx | 22 μ F | 6.8 μ H | 22 μ F |
| REM2A-12xx | 10 μ F | 10 μ H | 10 μ F |
| REM2A-24xx | 10 μ F | 15 μ H | 10 μ F |
| REM2A-48xx | 2.2 μ F | 68 μ H | 2.2 μ F |

DIMENSION & PHYSICAL CHARACTERISTICS




| Parameter | Type | Value |
|-------------------|-----------------|--|
| Materials | case/ baseplate | non-conductive black plastic, (UL94 V-0) |
| | PCB | FR4, (UL94 V-1) |
| | potting | silicone, (UL94 V-0) |
| Dimension (LxWxH) | | 24.3 x 14.4 x 10.2mm 0.95 x 0.57 x 0.40inch |
| Weight | | 7g typ. 0.015lbs |

REM2A Series \diamond Regulated DIP16 & SMD

2W \diamond Isolated Single & Dual Output \diamond 2:1 Input

DIMENSION & PHYSICAL CHARACTERISTICS

Dimension Drawing DIP16

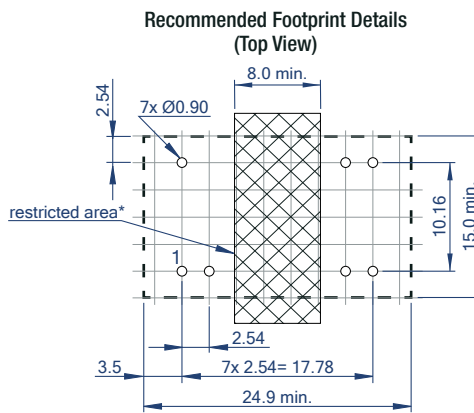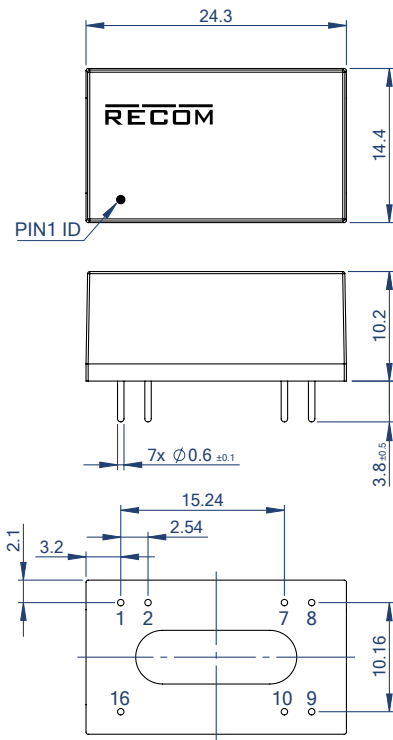



Pinning information

| Pin # | Single | Dual |
|-------|--------|-------|
| 1 | -Vin | -Vin |
| 2 | CTRL | CTRL |
| 7 | NC | NC |
| 8 | NC | Com |
| 9 | +Vout | +Vout |
| 10 | -Vout | -Vout |
| 16 | +Vin | +Vin |

NC= not connected

*There should be at least 8mm distance between primary and secondary circuit

Dimension Drawing SMD

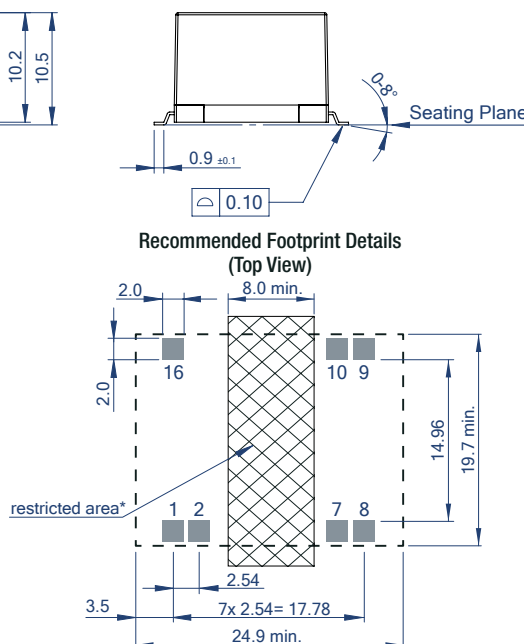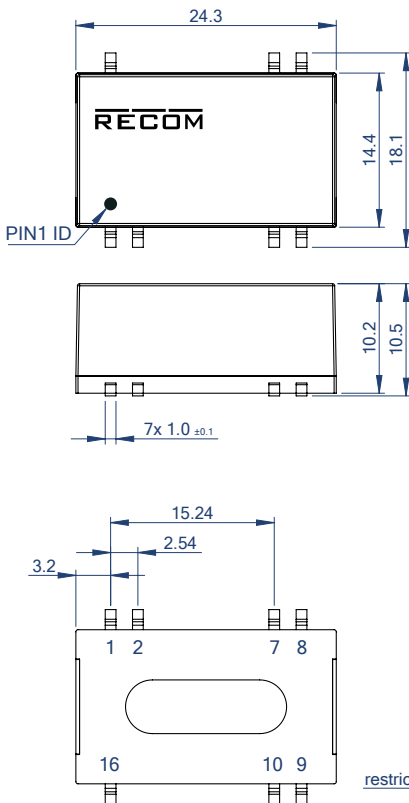

Pinning information

| Pin # | Single | Dual |
|-------|--------|-------|
| 1 | -Vin | -Vin |
| 2 | CTRL | CTRL |
| 7 | NC | NC |
| 8 | NC | Com |
| 9 | +Vout | +Vout |
| 10 | -Vout | -Vout |
| 16 | +Vin | +Vin |

NC= not connected


*There should be at least 8mm distance between primary and secondary circuit

Tolerances:
 x.x= $\pm 0.5\text{mm}$
 x.xx= $\pm 0.25\text{mm}$

REM2A Series \diamond Regulated DIP16 & SMD

2W \diamond Isolated Single & Dual Output \diamond 2:1 Input

SOLDER PROFILE FOR SMD TYPE

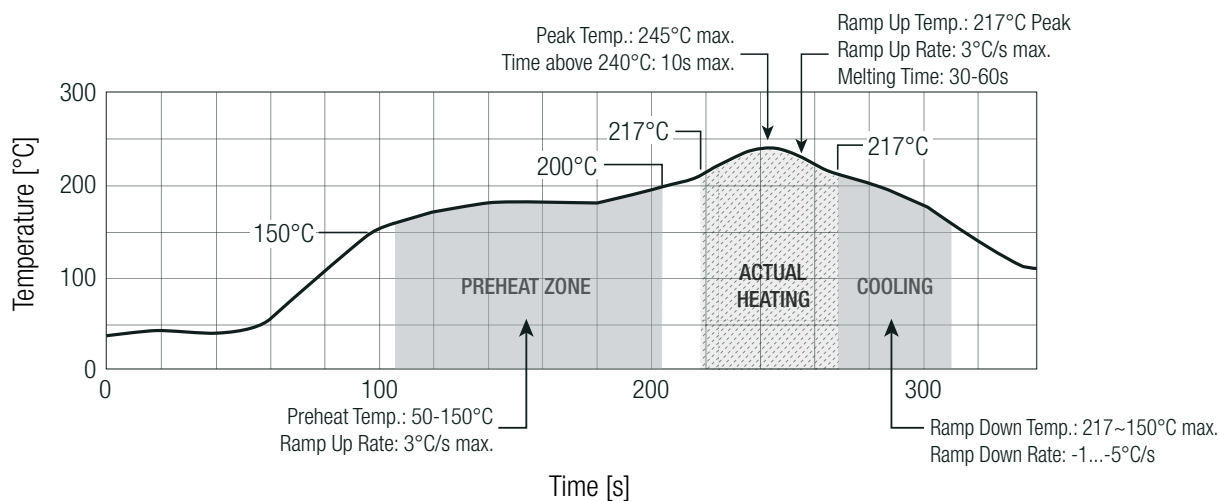

PACKAGING INFORMATION

| Parameter | Type | Value |
|----------------------------------|---|-------------------------|
| Packaging Dimension (LxWxH) | tube | 290.0 x 17.35 x 25.6mm |
| Packaging Quantity | | 10pcs |
| Storage Temperature Range | | -55°C to +125°C |
| Storage Humidity | non-condensing | 5-95% RH max. |
| Moisture Sensitivity Level (MSL) | only for SMD type verification according to IPC J-STD-020E | IPC J-STD-033C, Level 2 |

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.