

217825C PICK-UP TRUCK BED LINER POWER OUTLET

CASCO PRODUCTS

CASCO PICK-UP TRUCK BED LINER POWER OUTLET IS DESIGNED/ COMPLIANCE WITH SAE/US CAR INDUSTRY STANDARDS.

MATERIAL AND FINISH

- HOUSING – NYLON 6/6
- INSULATOR - NYLON 66 PER GM 7400M SPEC.
- TERMINAL – GROUND TIN PLATED BRASS

ELECTRICAL SPECIFICATIONS

- POWER RATING – 15 AMPS
- ISOLATION RESISTANCE - 20 MEG OHM WITH 500 VDC OR 440 VAC (60 CYCLES)

MECHANICAL SPECIFICATIONS

- TORSION SPRING - STAINLESS STEEL
- WELL - ZINC PLATED
- HOUSING – THICKNESS PER DRAWING

ENVIRONMENTAL SPECIFICATIONS


- SALT SPRAY – TEST FOR CORROSION
- WATER / DUST – TEST FOR WATER SPRAY AND DUST SPRAY PER SPECIFICATIONS
- OPERATING TEMP. - -40 TO 85C

LEAD WIRES


- RED COLOR / POSITIVE + / 17 FOOT LEAD WIRE
- BLACK COLOR / NEGATIVE - / 1 FOOT LEAD WIRE

DIRECTIONS / HOW TO INSTALL THE UNIT

Step 1

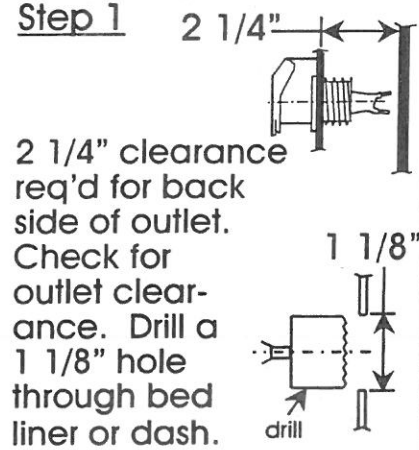

Step 2

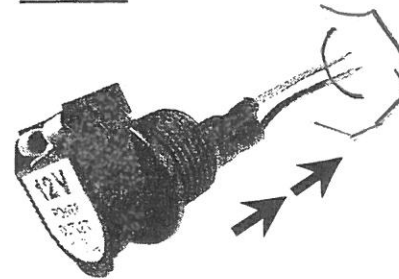

Run wires through hole in liner or dash. Put lock washer and nut on from back and tighten.

Step 3 Run lead wire (red) to fuse box or battery. If lead wire is connected directly to the battery, utilize a 15 Amp in-line fuse for protection. Attach ground wire (black) to grounded frame.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[217825C](#)