

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0982731006

Status:


Active

Overview:

NSCC - New Standard Casing Contact

Description:

3.33mm / 6.00mm Pitch Hybrid Inline Female Housing, Right Slide Orientation, Dual Row, 16 Circuits, Gray

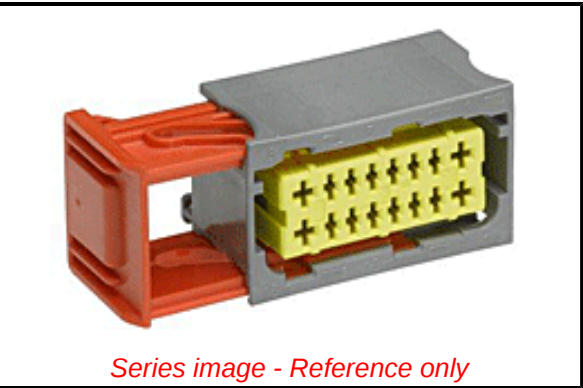

Series image - Reference only

Documents:

[3D Model](#)

[Drawing \(PDF\)](#)

[Application Specification AS-98273-001-001 \(PDF\)](#)

[Packaging Specification PK-98273-001-001 \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

General	
Product Family	Crimp Housings
Series	98273
Application	Power, Wire-to-Wire
Comments	7 Amps max @85°C for NSCC terminal 98897 with 2.00 mm² wire or 15 Amps max @85°C for UCC terminal 98898 with 4.00 mm² wire
Overview	NSCC - New Standard Casing Contact
Product Name	NSCC
UPC	822348213177
Physical	
Circuits (maximum)	16
Circuits Detail	4x2.8mm 12x1.5mm female terminals
Color - Resin	Natural, Natural (White)
Gender	Receptacle
Glow-Wire Capable	No
Lock to Mating Part	Yes
Material - Resin	Polyester, Polyester Alloy
Net Weight	17.591/g
Number of Rows	2
Packaging Type	Bag
Panel Mount	No
Pitch - Mating Interface	3.33mm, 6.00mm
Polarized to Mating Part	Yes
Ports	1
Stackable	No
Temperature Range - Operating	-40° to +85°C
Electrical	
Current - Maximum per Contact	15.0A, 7.0A
Solder Process Data	
Lead-freeProcess Capability	N/A
Material Info	
Reference - Drawing Numbers	
Application Specification	AS-98273-001-001
Packaging Specification	PK-98273-001-001
Sales Drawing	SD-98273-001-001, SD-98273-002-001

EU ELV

Compliant

EU RoHS

Compliant

REACH SVHC

Not Contained Per - D(2021)4569-DC (8 July 2021)

Halogen-Free

Status

Not Relevant

For more information, please visit

Contact US

China ROHS

ELV

RoHS Phthalates

Not Relevant

Compliant

Not Contained

Search Parts in this Series

98273 Series

Mates With

982761006

Use With

98897 NSCC Terminals, 98898 UCC2 Terminals

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[98273-1006](#)